


**RNAO45X62X40-ZW-ASR1-XL**

Needle roller bearing

Needle roller bearings RNAO...-ZW-ASR1,  
without ribs, double row

X-life

## Technical information

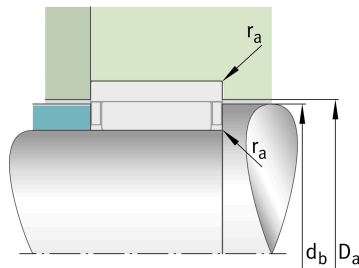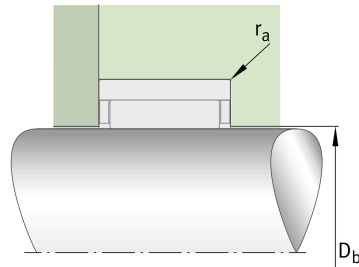

## Your current product variant

Lubrication hole	ASR1	ASR1
Number of rows	ZW	Double-row design

## Main Dimensions &amp; Performance Data

$F_w$	45 mm	Under roller diameter
$D$	62 mm	Outside diameter
$C$	40 mm	Width, outer ring
$C_r$	76.000 N	Basic dynamic load rating, radial
$C_{0r}$	135.000 N	Basic static load rating, radial
$C_{ur}$	21.900 N	Fatigue load limit, radial
$n_G$	10.000 1/min	Limiting speed
$n_{gr}$	5.900 1/min	Reference speed
$\approx m$	377 g	Weight

## Mounting dimensions

$D_b$	45,6 mm	Shoulder diameter axial guidance NK/housing
$d_b$	52,2 mm	Shoulder diameter axial guidance NK/shaft
$D_a$	53,5 mm	Shoulder diameter outer ring
$r_{a \max}$	0,3 mm	Maximum recess radius



### Dimensions

E	53 mm	Raceway diameter outer ring
r <sub>min</sub>	0,3 mm	Minimum chamfer dimension

### Temperature range

T <sub>min</sub>	-30 °C	Operating temperature min.
T <sub>max</sub>	120 °C	Operating temperature max.

### Characteristics

-  Radial load
-  Grease Lubrication
-  Oil Lubrication
-  Not sealed
-  Small design envelope