


**TSX25-D**

Profile rail

Guideways for linear recirculating roller bearing, TSX...-D

Technical information

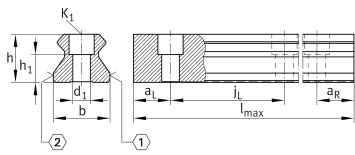

Your current product variant

Size code	25
Length	~4000
Version	D

Main Dimensions & Performance Data

h	22,3 mm	Height
b	23 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
≈m	2,9 kg/m	Weight

Mounting dimensions

K 1	M6	Fixing screws (DIN ISO 4762-12.9)
d 1	6,8 mm	Bore diameter
K1 M _A	17 Nm	Tightening torque



Dimensions

l_{\max}	3.930 mm	Max length single piece guideway
$a_{L \min}$	20 mm	Distance
$a_{L \max}$	23 mm	Distance
$a_{R \min}$	20 mm	Distance
$a_{R \max}$	23 mm	Distance
j_L	30 mm	Increment
h_1	11,8 mm	Length
Tol h_1	0,5 mm	Upper tolerance
Tol h_1	-0,5 mm	Lower tolerance

Additional information

RWU25-E-...	Usable carriage(s)
RUE25-E-...	Usable linear systems