


**TSX25-D**

## Profile rail

Guideways for linear recirculating roller bearing, TSX...-D

## Technical information

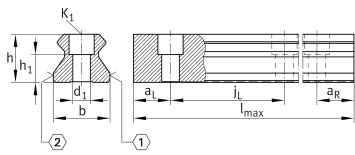

## Your current product variant

Size Code	25
Length	~4000
Version	D

## Main Dimensions &amp; Performance Data

h	22,3 mm	Height
b	23 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
≈m	2,9 kg/m	Weight

## Mounting dimensions

K 1	M6	Fixing screws (DIN ISO 4762-12.9)
d 1	6,8 mm	Bore diameter
K1 M A	17 Nm	Tightening torque



### Dimensions

$l_{max}$	3.930 mm	Max length single piece guideway
$a_{L min}$	20 mm	Distance
$a_{L max}$	23 mm	Distance
$a_{R min}$	20 mm	Distance
$a_{R max}$	23 mm	Distance
$j_L$	30 mm	Increment
$h_1$	11,8 mm	Length
Tol $h_1$	0,5 mm	Upper tolerance
Tol $h_1$	-0,5 mm	Lower tolerance

### Additional information

RWU25-E-...	Usable carriage(s)
RUE25-E-...	Usable linear systems