**TKVD25**

Profile rail

Guideways for linear recirculating ball bearing unit and four-row linear recirculating ball guidance system

Technical information

Your current product variant


Size code	25
Length	~6000

Main Dimensions & Performance Data

h	18,7 mm	Height
b	23 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
~m	2,7 kg/m	Weight

Mounting dimensions

K ₁	M6	Thread
K1 M _A	17 Nm	Tightening torque
d ₁	6,8 mm	Bore diameter

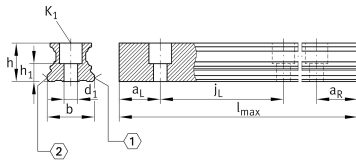



Dimensions

l_{max}	6.000 mm	Max length single piece guideway
$a_{L max}$	53 mm	Distance
$a_{L min}$	20 mm	Distance
$a_{R max}$	53 mm	Distance
$a_{R min}$	20 mm	Distance
j_L	60 mm	Increment
h_1	8,2 mm	Length
Tol h_1	0,5 mm	Upper tolerance
Tol h_1	-0,5 mm	Distance Distance

Additional information

KWVE25-B..	Usable carriage(s)
KUVE25-B..	Usable linear systems