**TKVD25**

## Profile rail

Guideways for linear recirculating ball bearing unit and four-row linear recirculating ball guidance system

## Technical information

## Your current product variant


Size Code	25
Length	~6000

## Main Dimensions &amp; Performance Data

h	18,7 mm	Height
b	23 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
~m	2,7 kg/m	Weight

## Mounting dimensions

K <sub>1</sub>	M6	Thread
K1 M <sub>A</sub>	17 Nm	Tightening torque
d <sub>1</sub>	6,8 mm	Bore diameter

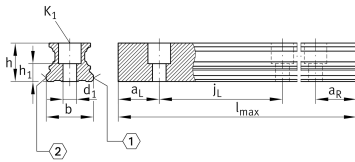



### Dimensions

$l_{max}$	6.000 mm	Max length single piece guideway
$a_{L max}$	53 mm	Distance
$a_{L min}$	20 mm	Distance
$a_{R max}$	53 mm	Distance
$a_{R min}$	20 mm	Distance
$j_L$	60 mm	Increment
$h_1$	8,2 mm	Length
Tol $h_1$	0,5 mm	Upper tolerance
Tol $h_1$	-0,5 mm	Distance Distance

### Additional information

KWVE25-B..	Usable carriage(s)
KUVE25-B..	Usable linear systems