

KWVE25-B-ESC

Recirculating ball bearing carriage

Carriages KWVE...-B-ESC, narrow, short carriage, four-row, full complement ball set



Technical information





Your current product variant

Size code	25
Version	B
Carriage design	ESC Expanded design, short, narrow carriage

Main Dimensions & Performance Data

H	33 mm	Height system
B	48 mm	Width carriage
L	58,2 mm	Overall length carriage
C	12.500 N	Dynamic load rating
C ₀	22.200 N	Static load rating
M _{0x}	305 Nm	Static moment rating about X axis
M _{0y}	155 Nm	Static moment rating about Y axis
M _{0z}	155 Nm	Static moment rating about Z axis
≈m	0,3 kg	Weight

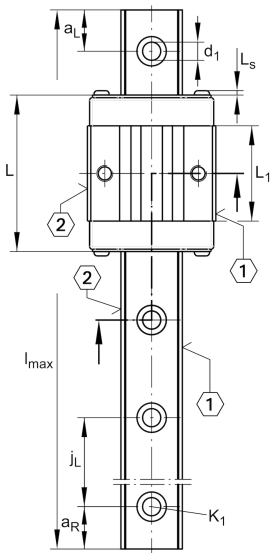

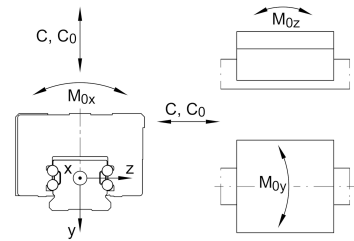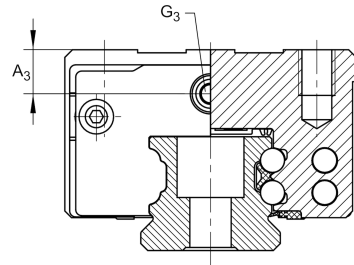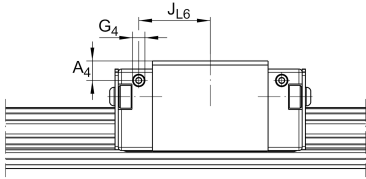

Mounting dimensions

A ₁	12,5 mm	Distance from locating edge on carriage to locating edge on guideway
J _B	35 mm	
b	23 mm	Width rail
A ₂	6,5 mm	Distance from locating edge to hole
L ₁	35,6 mm	
L _S	1,65 mm	
H ₁	5,1 mm	Free space, system dimension
H ₅	5,25 mm	
T ₅	10 mm	Thread depth
G ₂	M6	Fixing screws above (DIN ISO 4762-12.9)
G _{2 M_A}	17 Nm	Maximum tightening torque
A ₃	8 mm	Position lubrication connector
G ₃	M6	Lubrication connector
t _{G₃}	7 mm	Maximum permissible screw depth for lubrication connectors
A ₄	6 mm	Position lubrication connector
G ₄	M3	Lubrication connector
t _{G₄}	6 mm	Maximum permissible screw depth for lubrication connectors
J _{L6}	22 mm	Position lubrication connector

Additional information

VMKB_065	KWVE	Material name
----------	------	---------------