


**W30-H6-RROC**

Solid shaft

solid shafts, with axial and/or radial threaded holes

Technical information

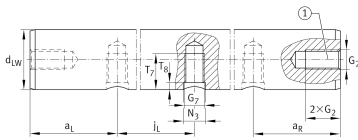

Your current product variant

Size code	30	
Diameter tolerance	H6	
Material	CF53	Heat treatable steel (material no.:1.1213)
Coating	RROC	Special coating Corrotect, anti corrosion protection

Main Dimensions & Performance Data

d _{LW}	30 mm	Diameter Shaft
L _{max}	6.000 mm	Length total maximum
≈m	5,55 kg/m	Weight

Mounting dimensions

d _{LW Tol}	h6	Diameter Shaft
h6 Tol	0 μm	Diameter Shaft high
h6 Tol	-13 μm	Diameter Shaft low
SHD _{min}	0,9 mm	Surface Hardness Depth
t ₁	6 μm	Roundness
t ₂	9 μm	Parallelism



Main dimensions

G 2	M10-M12-M16	Axial thread (size)
G 7	M6/M10	Radial thread (size)
B 01	M10/M12/M16	Drilling pattern axial thread one side
B 02	M10/M12/M16	Drilling pattern axial thread both side
B 03	M6/M10	Drilling pattern radial thread
B 04	M6/M10 + M10/M12/ M16	Drilling pattern radial thread+axial thread one side
B 05	M6/M10 + M10/M12/ M16	Drilling pattern radial thread+axial thread both side