**LFS20**

Guideway

solid profile, with two raceway shafts;
corrosion-resistant design possible

Technical information

Your current product variant




Size code	20
-----------	----

Main Dimensions & Performance Data

h	12,2 mm	Height
b	20 mm	Width
l_{\max}	2.400 mm	Length maximum
I_y	3.065 mm ⁴	Second moment of area
I_z	2.053 mm ⁴	Second moment of area
LF Q	165 mm ²	Cross-sectional area
W_y	362 mm ³	Wider resistance torque
W_z	324 mm ³	Wider resistance torque

Mounting dimensions

N_1	4,5 mm	Bore diameter
N_3	8 mm	Bore diameter

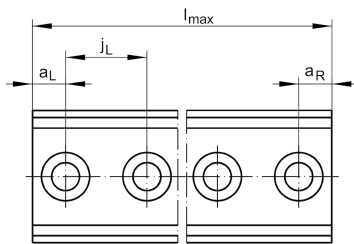



Dimensions

a ₂	16,2 mm	Distance
a _{L max}	54 mm	Distance
a _{L min}	9 mm	Distance
a _{R max}	54 mm	Distance
a _{R min}	9 mm	Distance
b ₁	17 mm	Width
d _{LW}	4 mm	Diameter
e _Z	6,4 mm	Distance
h ₁	7,6 mm	Height
h ₄	9 mm	Height
j _L	62,5 mm	Increment