**LFS32**

## Guideway

solid profile, with two raceway shafts;  
corrosion-resistant design possible

## Technical information

## Your current product variant




Size Code	32
-----------	----

## Main Dimensions &amp; Performance Data

h	20 mm	Height
b	32 mm	Width
$l_{\max}$	6.000 mm	Length maximum
$I_y$	20.100 mm <sup>4</sup>	Second moment of area
$I_z$	14.100 mm <sup>4</sup>	Second moment of area
LF Q	440 mm <sup>2</sup>	Cross-sectional area
$W_y$	1.440 mm <sup>3</sup>	Wider resistance torque
$W_z$	1.360 mm <sup>3</sup>	Wider resistance torque

## Mounting dimensions

$N_1$	6,5 mm	Bore diameter
$N_3$	12 mm	Bore diameter

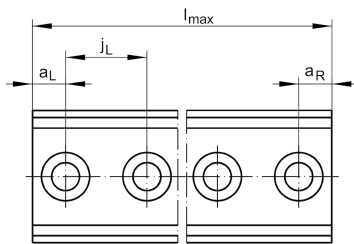



### Dimensions

a <sub>2</sub>	26 mm	Distance
a <sub>L max</sub>	116 mm	Distance
a <sub>L min</sub>	11 mm	Distance
a <sub>R max</sub>	116 mm	Distance
a <sub>R min</sub>	11 mm	Distance
b <sub>1</sub>	24 mm	Width
d <sub>LW</sub>	6 mm	Diameter
e <sub>Z</sub>	10,4 mm	Distance
h <sub>1</sub>	12 mm	Height
h <sub>4</sub>	15 mm	Height
j <sub>L</sub>	125 mm	Increment