
**LFS32-FHE** [↗](#)

Guideway

flat solid profile, half guideway, fixing hole spacing half of standard, with one raceway shaft; corrosion-resistant design possible

Technical information



Your current product variant



Size Code	32	
Design	FH	Flat solid profile, half guideway
Locationing guideway	E	Fixing hole spacing half of standard

Main Dimensions & Performance Data

h	10 mm	Height
b	26 mm	Width
l _{max}	4.000 mm	Length maximum
I _y	8.681 mm ⁴	Second moment of area
I _z	1.897 mm ⁴	Second moment of area
LF _Q	216 mm ²	Cross-sectional area
W _y	790 mm ³	Wider resistance torque
W _z	379 mm ³	Wider resistance torque

Mounting dimensions

N ₁	6,5 mm	Bore diameter
N ₃	12 mm	Bore diameter

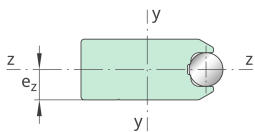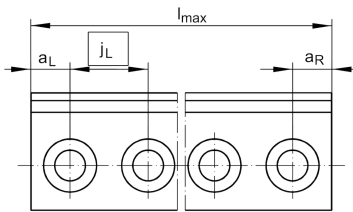



Dimensions

a ₂	23 mm	Distance
a _{L max}	52 mm	Distance
a _{L min}	11 mm	Distance
a _{R max}	52 mm	Distance
a _{R min}	11 mm	Distance
d _{LW}	6 mm	Diameter
e _Z	5 mm	Distance
h ₁	3,5 mm	Height
h ₄	5 mm	Height
j _L	62,5 mm	Increment