

LFS52-M [↗](#)

Guideway

hollow section profile, with fixing slots, with two raceway shafts; corrosion-resistant design possible




Technical information

Your current product variant

Size Code	52	
Design	M	Hollow section profile, with fixing slots

Main Dimensions & Performance Data

h	98,6 mm	Height
b	52 mm	Width
l _{max}	8.000 mm	Length maximum
I _y	3.717.250 mm ⁴	Second moment of area
I _z	3.014.470 mm ⁴	Second moment of area
LF _Q	3.691 mm ²	Cross-sectional area
W _y	66.380 mm ³	Wider resistance torque
W _z	55.462 mm ³	Wider resistance torque

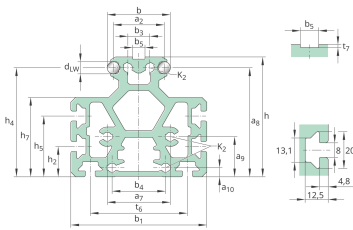



Dimensions

a 2	42 mm	Distance
a 7	52 mm	Distance
a 8	89,7 mm	Distance
a 9	33 mm	Distance
a 10	7,5 mm	Distance
b 1	112 mm	Width
b 3	18 mm	Width
b 4	44 mm	Width
b 5	10,2 mm	Width
d LW	10 mm	Diameter
e Z	42,6 mm	Distance
h 2	25 mm	Height
h 4	89,7 mm	Height
h 5	50 mm	Height
h 7	65,4 mm	Height
K 2	7,45 mm	Diameter
t 6	80 mm	Depth
t 7	1,8 mm	Depth