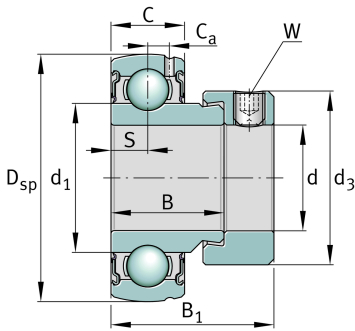


**GE40-KRR-B-FA107-VA-FD** [↗](#)

Radial insert ball bearing

## Technical information

**Main Dimensions & Performance Data**

d	40 mm	Bore diameter
D <sub>SP</sub>	80 mm	Outside diameter
B	30,2 mm	Width
C <sub>0r</sub>	18.140 N	Basic static load rating, radial
C <sub>ur</sub>	800 N	Fatigue load limit, radial
B <sub>1</sub>	43,7 mm	Locking collar total width
C <sub>r</sub>	29.520 N	Basic dynamic load rating, radial
≈m	0,63 kg	Weight

**Dimensions**

C	18 mm	Width, outer ring
S	9 mm	Distance raceway
d <sub>1</sub>	52,4 mm	Rib diameter inner ring
C <sub>a</sub>	5,5 mm	Distance to lubrication hole
d <sub>3</sub>	60,3 mm	Outside diameter locking collar/locknut
W	4 mm	Width of flats

**Temperature range**

T <sub>min</sub>	-30 °C	Operating temperature min.
T <sub>max</sub>	100 °C	Operating temperature max.



### Calculation factors

---

$f_0$	14	Calculation factor
-------	----	--------------------

### Characteristics

---

-  Radial load
-  Axial load in one direction
-  Axial load in two directions
-  Lifetime lubrication, freedom from maintenance
-  Grease Lubrication
-  Sealed on both sides
-  Protected against rust
-  Static angular error and misalignment