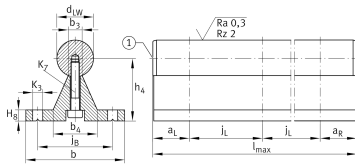


**TSWW50**

Guideways, metric sizes

Technical information

**Main Dimensions & Performance Data**

d _{LW}	50 mm	Diameter shaft
BGR	50	Dimension of shaft and support body unit
d _{LW Tol}	h6	Diameter tolerance shaft
h ₄	65,06 mm	Height dimension
h _{4 tol}	0,02 mm	Height dimension tolerance (High)
h _{4 tol}	-0,02 mm	Height dimension tolerance (Low)
b	85 mm	Support rail width bottom
L _{max}	6.000 mm	Shaft and support rail unit length
L _{tol max}	3 mm	Length tolerance (max)
L _{tol min}	-3 mm	Length tolerance (min)



Mounting dimensions

a _{L min}	20 mm	Distance thread a _L (min)
a _{L max}	139 mm	Distance thread a _L (max)
a _{R min}	20 mm	Distance thread a _R (min)
a _{R max}	139 mm	Distance thread a _R (max)
b ₃	16,3 mm	Support rail width prism
b ₄	46 mm	Support rail width top
H ₈	10 mm	Support rail thickness foot
j _B	65 mm	Bore width distance j _B
j _L	150 mm	Bore length distance j _L
K ₃	9 mm	Adjacent construction bore
K ₇	M10x45	Screw size
m _S	19,75 kg/m	Shaft and support rail unit weight