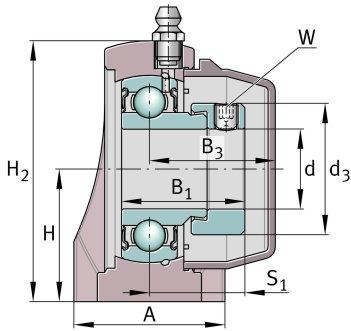



**RASE35-TV-VA-FD**

Plummer block housing unit

Plummer block housing units, FD design

Technical information

**Your current product variant**

| | | |
|-----------------------------|-------|-------------------------------|
| Special material | TV | Plastic housing |
| Corrosion resistant bearing | VA | Corrosion-resistant VA design |
| Material | TV-FD | Plastic for food industry |

Main Dimensions & Performance Data

| | | |
|-----|--------|---------------|
| d | 35 mm | Bore diameter |
| L | 167 mm | Length |
| H 2 | 94 mm | Height |
| ≈m | 0,8 kg | Weight |

Mounting dimensions

| | | |
|-----|--------|----------------------|
| J | 127 mm | Distance fixing bore |
| N | 14 mm | Width (slot) |
| N 1 | 18 mm | Length (slot) |
| W | 3 mm | Width of flats |



Dimensions

| | | |
|----------------|-------------|---|
| H | 47,6 mm | Distance shaft axis |
| A | 48 mm | Width (base) |
| H ₁ | 18 mm | Height (base) |
| B ₁ | 38,9 mm | Locking collar total width |
| B ₃ | 44,85 mm | Distance housing centre to cap end |
| S ₁ | 30,4 mm | Distance raceway to locking collar |
| Q | 1/4"-28 UNF | Connection thread for lubrication |
| d ₃ | 55,6 mm | Outside diameter eccentric locking collar |

Additional information

| | |
|------------------------|---------------------|
| GEH.ASE07-TV-WHT | Housing |
| GE35-KRR-B-FA107-VA-FD | Bearing designation |
| KASK07-S-G-WHT | End cap |
| KASK07-S-R-NBR-WHT | Open protecting cap |

Temperature range

| | | |
|------------------|--------|----------------------------|
| T _{min} | -30 °C | Operating temperature min. |
| T _{max} | 100 °C | Operating temperature max. |