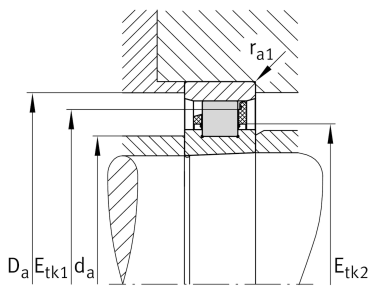



**FAG****N1013-D-K-PVPA1-SP-XL**

Cylindrical roller bearing

Super precision cylindrical roller bearings  
N10..-D-K-PVPA1-SP-XL, Non-locating  
bearing, with tapered bore, taper 1:12,  
separable, with cage

## Technical information

**Your current product variant**

Cage	PVPA1	PEEK-cage
Tolerance class	SP	Tolerance class SP
Bore type	K	Tapered, taper 1:12
Change mark	D	Internal Variant D
Radial internal clearance	C1 (Group 1)	Internal clearance smaller than C2
Number of rows	1	Single-row design

**Main Dimensions & Performance Data**

d	65 mm	Bore diameter
D	100 mm	Outside diameter
B	18 mm	Width
$C_r$	47.000 N	Basic dynamic load rating, radial
$C_{0r}$	49.000 N	Basic static load rating, radial
$C_{ur}$	7.900 N	Fatigue load limit, radial
$n_G$ Grease	18.200 1/min	Limiting speed for grease lubrication
$n_G$ Oil	21.400 1/min	Limiting speed for oil lubrication
$m$	432,6 g	Weight



### Mounting dimensions

$d_a$	75 mm	Diameter shaft shoulder
	h12	Diameter shaft shoulder tolerance
$D_a$	92,2 mm	Diameter of housing shoulder
	H12	Diameter of housing shoulder tolerance
$E_{tk 1 nom}$	88,5 mm	Injection pitch diameter min
$E_{tk 2 nom}$	79,4 mm	Injection pitch diameter nom
$r_{a1 max}$	1 mm	Maximum recess radius





### Dimensions

$r_{1 min}$	1 mm	Minimum chamfer dimension
$s_1$	1,6 mm	Axial displacement
$s_2$	3,4 mm	Axial displacement
$E$	91 mm	Raceway diameter outer ring

### Temperature range

$T_{min}$	-30 °C	Operating temperature min.
$T_{max}$	150 °C	Operating temperature max.

### Characteristics

	Radial load
	Grease Lubrication
	Oil Lubrication
	Not sealed