


**GF70-DO-2TS**

Rod end

Hydraulic rod end, with rectangular welding face, requiring maintenance, sliding contact surface: steel/steel, sealed design

Technical information

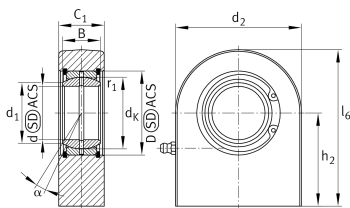

Your current product variant

Clampable	Not clampable	
Maintenance	Maintenance required	
Lubrication nipple	DIN71412-AM6 (tapered grease nipple)	
Slotted	No	
Sealing	2TS	Integrated triple lip high performance seals on both sides
Mounting	Weldable, rectangular	

Main Dimensions & Performance Data

C_r	407.000 N	Basic dynamic load rating, radial
C_{0r}	725.000 N	Basic static load rating, radial
d	70 mm	Bore diameter bearing
d_2	164 mm	Outer eye diameter
l_6	197 mm	Total length welding head
D	105 mm	Outside diameter bearing
B	49 mm	Width inner ring
$\approx m$	10,3 kg	Weight



Dimensions

d_K	92 mm	Ball diameter
α	6 °	Tilt angle
C_1	55 mm	Width of the rod end
$C_{1 \max}$	56 mm	Width of the rod end, max.
h_2	115 mm	Shank Length Welding Head
d_{UT}	-0,015 mm	Bore diameter bearing, lower tolerance
d_{OT}	0 mm	Bore diameter bearing, upper tolerance
B_{UT}	-0,15 mm	Width inner ring, lower tolerance
B_{OT}	0 mm	Width inner ring, upper tolerance
G_r	0,055 - 0,142	Radial Clearance
$G_{r\max}$	0,142 mm	Radial clearance, maximum
$G_{r\min}$	0,055 mm	Radial clearance, minimum

Mounting dimensions








$r_{1\min}$	1 mm	Edge Spacing
d_1	77,9 mm	Outer flange diameter inner ring

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	100 °C	Operating temperature max.



Characteristics

-  Radial load
-  Axial load in one direction
-  Axial load in two directions
-  Grease Lubrication
-  Sealed on both sides
-  Static angular error and misalignment
-  Dynamic angular error and misalignment