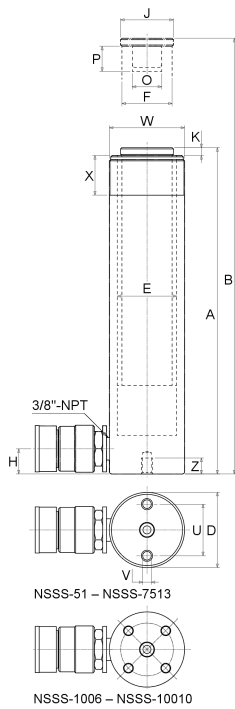


**NSSF-7513**

Hydraulic cylinder, 700 bar

BETEX NSSF Standard cylinder, single-acting, spring return, 75T class

Technical information

**Your current product variant**

Series	NSSF	Standard cylinder
Version	75T	Capacity class 75

Technical data

	75	Capacity class (tons)
s_p	333,5 mm	Stroke
F_a	791 kN	Advance force, max.
P_{max}	700 bar	Operating pressure, max.
V_{oil}	3.770 cm ³	Oil capacity
A	491 mm	Height, retracted
B	824,5 mm	Height, extended
D	152 mm	Outer diameter
E	120 mm	Cylinder bore diameter
F	95 mm	Plunger diameter
H	30 mm	Base to advance port
J	70 mm	Saddle diameter
K	3 mm	Saddle protrusion from plunger
W	5/8"-12 UN	Collar thread (UN)
X	45 mm	Collar thread, length
$\approx m$	59 kg	Weight



View product details on medias

02.05.2026, 17:07:59 UTC

SCHAEFFLER

Additional information

Hard chrome plated and
hardened piston,
Rolled inside of cylinder,
Sandblasted outside
with black nitride coating,
Coupling with dust cap

Product specifics