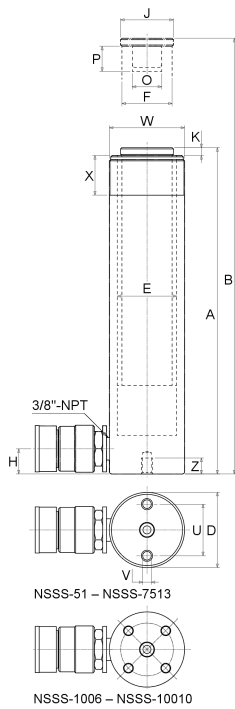


**NSSF-7513**

Hydraulic cylinder, 700 bar

BETEX NSSF Standard cylinder, single-acting, spring return, 75T class

## Technical information

**Your current product variant**

Series	NSSF	Standard cylinder
Version	75T	Capacity class 75

**Technical data**

	75	Capacity class (tons)
$s_p$	333,5 mm	Stroke
$F_a$	791 kN	Advance force, max.
$P_{max}$	700 bar	Operating pressure, max.
$V_{oil}$	3.770 cm <sup>3</sup>	Oil capacity
A	491 mm	Height, retracted
B	824,5 mm	Height, extended
D	152 mm	Outer diameter
E	120 mm	Cylinder bore diameter
F	95 mm	Plunger diameter
H	30 mm	Base to advance port
J	70 mm	Saddle diameter
K	3 mm	Saddle protrusion from plunger
W	5/8"-12 UN	Collar thread (UN)
X	45 mm	Collar thread, length
$\approx m$	59 kg	Weight



View product details on medias

28.06.2026, 23:12:44 UTC

SCHAEFFLER

### Additional information

---

Hard chrome plated and  
hardened piston,  
Rolled inside of cylinder,  
Sandblasted outside  
with black nitride coating,  
Coupling with dust cap

Product specifics