



**KWEM15-E-V0-G2**

Miniature Carriage, Standard for Miniature-Guideway, Standard

Miniature Carriage, Standard; for Miniature-Guideway, Standard

## Technical information

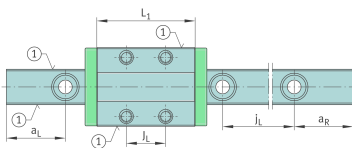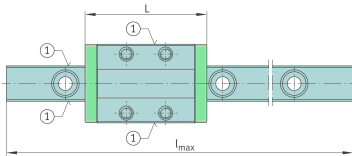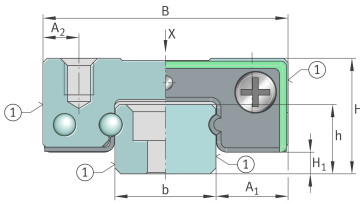

## Your current product variant

Size code	15	
Version	E	
Carriage design	/	Standard Design
Preload class	V0	Slight clearance
Accuracy class	G2	

## Main Dimensions &amp; Performance Data

H	16 mm	Height system
B	32 mm	Width carriage
L	44 mm	Length of carriage
C	3.900 N	Dynamic load rating
C <sub>0</sub>	5.850 N	Basic static load capacity
M <sub>0x</sub>	38,9 Nm	Static moment rating about X axis
M <sub>0y</sub>	23,9 Nm	Static moment rating about Y axis
M <sub>0z</sub>	23,9 Nm	Static moment rating about Z axis
≈m	80 g	Weight



### Mounting dimensions

b	15 mm	Width rail
A <sub>1</sub>	8,5 mm	Distance from locating edge on carriage to locating edge on guideway
A <sub>2</sub>	3,5 mm	Distance from locating edge to hole
H <sub>1</sub>	4 mm	Free space, system dimension
J <sub>B</sub>	25 mm	Hole spacing
J <sub>L</sub>	20 mm	Hole Spacing
T <sub>5</sub>	4 mm	Thread depth
A <sub>3</sub>	2,3 mm	Position lubrication connector
G2	M3	Thread size
G2 M <sub>A</sub>	1,1 Nm	Maximum tightening torque

### Additional information

VMKB_065	KWEM	Material name
----------	------	---------------