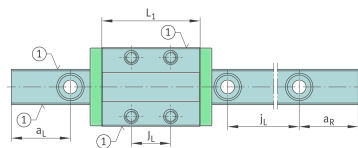
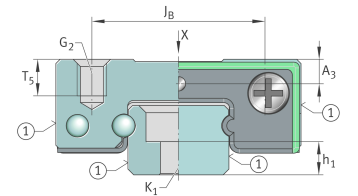
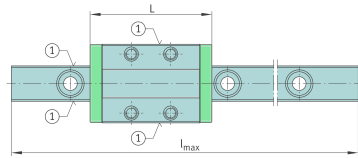
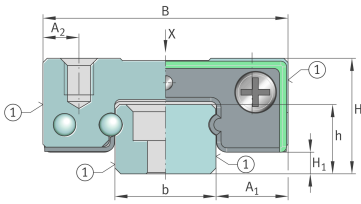


**KWEM15-E-PP-V1-G2** [↗](#)

Miniature Carriage, Standard for Miniature-Guideway, Standard

Miniature-Carriage, Standard, with end wipers; for Miniature guideway, Standard

## Technical information

**Your current product variant**

Size code	15	
Version	E	
Carriage design	/	Standard Design
Seal	PP	With end wipers in the end pieces
Preload class	V1	Preload class 1
Accuracy class	G2	

**Main Dimensions & Performance Data**

H	16 mm	Height system
B	32 mm	Width carriage
L	44 mm	Length of carriage
C	3.900 N	Dynamic load rating
C <sub>0</sub>	5.850 N	Basic static load capacity
M <sub>0x</sub>	38,9 Nm	Static moment rating about X axis
M <sub>0y</sub>	23,9 Nm	Static moment rating about Y axis
M <sub>0z</sub>	23,9 Nm	Static moment rating about Z axis
≈m	80 g	Weight



### Mounting dimensions

---

b	15 mm	Width rail
A <sub>1</sub>	8,5 mm	Distance from locating edge on carriage to locating edge on guideway
A <sub>2</sub>	3,5 mm	Distance from locating edge to hole
H <sub>1</sub>	4 mm	Free space, system dimension
J <sub>B</sub>	25 mm	Hole spacing
J <sub>L</sub>	20 mm	Hole Spacing
T <sub>5</sub>	4 mm	Thread depth
A <sub>3</sub>	2,3 mm	Position lubrication connector
G2	M3	Thread size
G2 M <sub>A</sub>	1,1 Nm	Maximum tightening torque

### Additional information

---

VMKB_065	KWEM	Material name
----------	------	---------------