

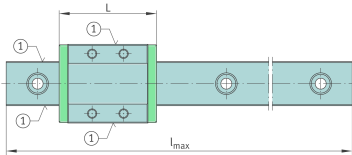



**TKDM07X2000-E-W-EWL-G2** [↗](#)

Miniature Guideway for Miniature-Carriage, Standard design

Miniature Guideway, Wide design; for Miniature- Carriage, Wide and Wide-Long design

Technical information

**Your current product variant**

Size code	07
Length	~2000
Version	E
Guideway design	W
Accuracy class	G2

Main Dimensions & Performance Data

h	5,2 mm	Height
b	14 mm	Width rail
l _{max}	2.000 mm	Max length single piece guideway
≈m	1,06 kg	Weight

Mounting dimensions

h ₁	1,7 mm	Length
j _L	30 mm	Increment
a _{L min}	5 mm	Distance between start of guideway and nearest hole
a _{L max}	25 mm	Distance between start of guideway and nearest hole
a _{R min}	5 mm	Distance between end of guideway and nearest hole
a _{R max}	25 mm	Distance between end of guideway and nearest hole
K ₁	M3	Thread
K1 M _A	1,1 Nm	Tightening torque