

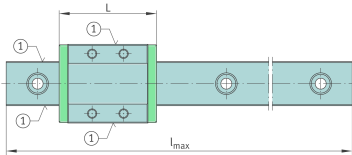



**TKDM12X2000-E-W-EWL-G2** [↗](#)

Miniature Guideway for Miniature-Carriage, Standard design

Miniature Guideway, Wide design; for Miniature- Carriage, Wide and Wide-Long design

## Technical information

**Your current product variant**

Size Code	12
Length	~2000
Version	E
Guideway design	W
Accuracy class	G2

**Main Dimensions & Performance Data**

h	8,5 mm	Height
b	24 mm	Width rail
l <sub>max</sub>	2.000 mm	Max length single piece guideway
≈m	3,02 kg	Weight

**Mounting dimensions**

h <sub>1</sub>	4 mm	Length
j <sub>L</sub>	40 mm	Increment
a <sub>L min</sub>	6 mm	Distance between start of guideway and nearest hole
a <sub>L max</sub>	34 mm	Distance between start of guideway and nearest hole
a <sub>R min</sub>	6 mm	Distance between end of guideway and nearest hole
a <sub>R max</sub>	34 mm	Distance between end of guideway and nearest hole
K <sub>1</sub>	M4	Thread
K1 M <sub>A</sub>	1,1 Nm	Tightening torque