




TLS-15T-DUO-SET

Hydraulic wedge spreader

BETEX TLS Duo set, for lifting loads and spreading 2 components

Technical information

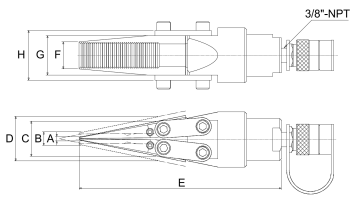

Your current product variant

Version	DS	Duo set

Technical data

	15 (2x)	Capacity class (tons)
	25 mm	Stroke cylinder
	700 bar	Operating pressure
A	5 mm	Spread, min.
B	15 mm	Spread, max.
C	36 mm	
D	46 mm	
E	232 mm	
F	31 mm	
G	45 mm	
H	57 mm	
≈m	26 kg	Weight



Additional information

Hardened steel jaws, vertical lifting to exact position, use in narrow spaces from 5 to 43 mm, can be operated by one person

Product specifics

for industrial maintenance and repair jobs

Usability

2 wedge spreaders, two-stage hand pump with double manifold, 2x hose with quick coupling set, 2x stepped safety block, 2x pressure gauge, 2x T-piece, steel box

Delivery scope