




TLS-25T-SET [↗](#)

Hydraulic wedge spreader

BETEX TLS Set, for lifting loads and spreading 2 components

Technical information

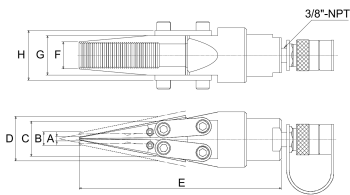

Your current product variant

Version	ST	Set

Technical data

	25	Capacity class (tons)
	65 mm	Stroke cylinder
	700 bar	Operating pressure
A	7 mm	Spread, min.
B	23 mm	Spread, max.
C	42,5 mm	
D	59 mm	
E	342 mm	
F	50,5 mm	
G	70 mm	
H	82 mm	
≈m	23 kg	Weight



Additional information

Hardened steel jaws,
vertical lifting to
exact position, use
in narrow spaces
from 5 to 43 mm, can
be operated by one
person

Product specifics

for industrial
maintenance and
repair jobs

Usability

1x wedge spreader,
two-stage hand
pump, hose with
quick coupling set,
stepped safety block,
pressure gauge, T-
piece, steel box

Delivery scope