




TLS-25T-DUO-SET

Hydraulic wedge spreader

BETEX TLS Duo set, for lifting loads and spreading 2 components

Technical information

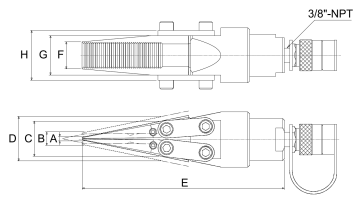

Your current product variant

Version	DS	Duo set

Technical data

	25 (2x)	Capacity class (tons)
	65 mm	Stroke cylinder
	700 bar	Operating pressure
A	7 mm	Spread, min.
B	23 mm	Spread, max.
C	42,5 mm	
D	59 mm	
E	342 mm	
F	50,5 mm	
G	70 mm	
H	82 mm	
≈m	37 kg	Weight



Additional information

Hardened steel jaws,
vertical lifting to
exact position, use
in narrow spaces
from 5 to 43 mm, can
be operated by one
person

Product specifics

for industrial
maintenance and
repair jobs

Usability

2 wedge spreaders,
two-stage hand
pump with double
manifold, 2x hose
with quick coupling
set, 2x stepped
safety block, 2x
pressure gauge, 2x
T-piece, steel box

Delivery scope