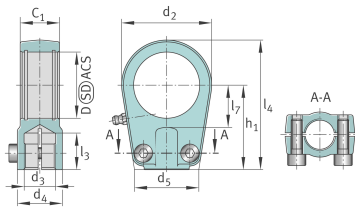


**KO.GIHRK100-0860** [↗](#)

## Rod end housing

Hydraulic rod end, with thread clamping device, right hand thread, without plain bearing

## Technical information

**Main Dimensions & Performance Data**

d <sub>2</sub>	231 mm	Outer eye diameter
D	150 mm	Outside diameter bearing
C <sub>0r</sub>	1.120.000 N	Basic static load rating, radial
≈m	25,2 kg	Weight

**Dimensions**

d <sub>3</sub>	M110x2	Thread size
d <sub>4</sub>	138 mm	Shank diameter
h <sub>1</sub>	235 mm	Shank Length Internal thread head
C <sub>1 max</sub>	70,3 mm	Width of the rod end, max.
C <sub>1</sub>	70 mm	Width of the rod end
l <sub>7</sub>	105 mm	Distance drilling with/shaft start
l <sub>4</sub>	360 mm	Total length internal thread head
l <sub>3</sub>	104 mm	Thread length Internal thread
d <sub>5</sub>	200 mm	Shank diameter, large
M <sub>A</sub>	660 Nm	Tightening torque

**Temperature range**

T <sub>min</sub>	-60 °C	Operating temperature min.
T <sub>max</sub>	200 °C	Operating temperature max.