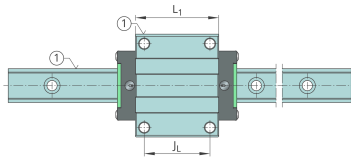


**KWLT35-AL-V1-G3** [↗](#)

## Recirculating ball bearing carriage

Long flanged carriage, standard end plate, for four-row linear recirculating ball bearing and guideway assembly

## Technical information

**Your current product variant**

Size code	35	
Carriage design	AL	Long design
Preload	V1	Slight preload (standard)
Accuracy class	G3	

**Main Dimensions & Performance Data**

H	48 mm	Height system
B	100 mm	Width carriage
L	142,5 mm	Overall length carriage
C	45.000 N	Dynamic load rating
C <sub>0</sub>	86.000 N	Basic static load capacity
M <sub>0x</sub>	1.680 Nm	Static moment rating about X-axis
M <sub>0y</sub>	1.390 Nm	Static moment rating about Y-axis
M <sub>0z</sub>	1.390 Nm	Static moment rating about Z-axis
M <sub>0x</sub>	807 Nm	Dynamic moment rating about X-axis
M <sub>0y</sub>	1.224 Nm	Dynamic moment rating about y-axis
M <sub>0z</sub>	1.224 Nm	Dynamic moment rating about Z-axis
m	2,02 kg	Weight



### Mounting dimensions

---

A <sub>1</sub>	33 mm	Distance from locating edge on carriage to locating edge on guideway
A <sub>2</sub>	9 mm	Distance from locating edge to hole
L <sub>1</sub>	105,5 mm	Carrier length
H <sub>1</sub>	9,5 mm	Free space, system dimension
J <sub>B</sub>	82 mm	Hole spacing
J <sub>L</sub>	62 mm	Hole Spacing
A <sub>3</sub>	8 mm	Position lubrication connector
T <sub>5</sub>	13 mm	Thread depth
G <sub>2</sub>	M10	Thread size, DIN ISO 4762-12.9
G2 M <sub>A</sub>	81 Nm	Maximum tightening torque

### Additional information

---

VMKB_065	KWLT	Material name
----------	------	---------------