



**GE530-DW-XL**

## Spherical plain bearing

Large radial spherical plain bearing, maintenance-free, sliding layer: ELGOGLIDE, inner ring curved surface with hard chromium coating, DIN ISO 12240-1, dimension series C, open design

X-life

## Technical information

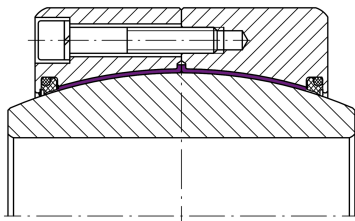

## Your current product variant

Maintenance	Maintenance free
Sealing	Without Without
Bore lining	Without
Coating	Without
Fabric	ELGOGLIDE
Material	Steel

## Main Dimensions &amp; Performance Data

d	530 mm	Bore diameter bearing
$C_r$	38.100.000 N	Basic dynamic load rating, radial
D	710 mm	Outside diameter bearing
B	243 mm	Width inner ring
C	205 mm	Width Outer ring
$C_{0r}$	63.600.000 N	Basic static load rating, radial
$\approx m$	290,5 kg	Weight



### Mounting dimensions

$r_{1\text{min}}$	2 mm	Edge Spacing
$r_{2\text{min}}$	5 mm	Edge Spacing
$D_{\text{amin}}$	591 mm	Housing Connection Diameter
$d_{\text{amax}}$	570,3 mm	Connection measurement, inner ring

### Dimensions

$d_{\kappa}$	620 mm	Ball diameter
$\alpha$	3,7 °	Tilt angle
$D_{\text{OT}}$	0 mm	Outside diameter, upper tolerance
$D_{\text{UT}}$	-0,075 mm	Outside diameter, lower tolerance
$B_{\text{OT}}$	0 mm	Width inner ring, upper tolerance
$d_{\text{UT}}$	-0,05 mm	Bore diameter bearing, lower tolerance
$B_{\text{UT}}$	-0,5 mm	Width inner ring, lower tolerance
$d_{\text{OT}}$	0 mm	Bore diameter bearing, upper tolerance
$C_{\text{OT}}$	0 mm	Width outer ring, upper tolerance
$C_{\text{UT}}$	-1,1 mm	Width outer ring, lower tolerance
$G_{\text{r}}$	0 - 0,145	Radial Clearance
$G_{\text{rmax}}$	0,145 mm	Radial clearance, maximum
$G_{\text{rmin}}$	0 mm	Radial clearance, minimum









### Temperature range

$T_{\text{min}}$	-50 °C	Operating temperature min.
$T_{\text{max}}$	150 °C	Operating temperature max.



### Characteristics

---

-  Radial load
-  Axial load in one direction
-  Axial load in two directions
-  Lifetime lubrication, freedom from maintenance
-  Not sealed
-  Large bearing
-  Static angular error and misalignment
-  Dynamic angular error and misalignment