




**GE630-DW-2RS2-XL**

## Spherical plain bearing

Large radial spherical plain bearing, maintenance-free, sliding layer: ELGOGLIDE, inner ring curved surface with hard chromium coating, DIN ISO 12240-1, dimension series C, sealed

X-life

## Technical information

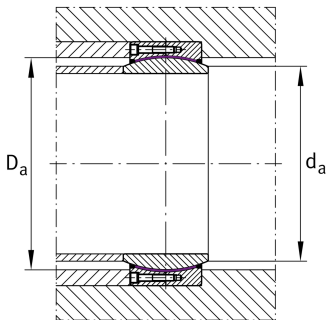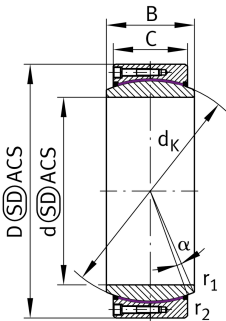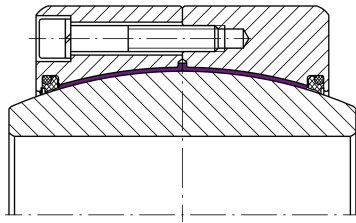

## Your current product variant

Maintenance	Maintenance free
Sealing	2RS2 Lip seals with increased sealing action on both sides
Bore lining	Without
Coating	Without
Fabric	ELGOGLIDE
Material	Steel

## Main Dimensions &amp; Performance Data

d	630 mm	Bore diameter bearing
C <sub>r</sub>	51.500.000 N	Basic dynamic load rating, radial
D	850 mm	Outside diameter bearing
B	300 mm	Width inner ring
C	260 mm	Width Outer ring
C <sub>0r</sub>	85.800.000 N	Basic static load rating, radial
≈m	529 kg	Weight



### Mounting dimensions

$r_{1\text{min}}$	3 mm	Edge Spacing
$r_{2\text{min}}$	6 mm	Edge Spacing
$D_{\text{amin}}$	698 mm	Housing Connection Diameter
$d_{\text{amax}}$	676,4 mm	Connection measurement, inner ring

### Dimensions

$d_{\kappa}$	740 mm	Ball diameter
$\alpha$	3,3 °	Tilt angle
$D_{\text{OT}}$	0 mm	Outside diameter, upper tolerance
$D_{\text{UT}}$	-0,1 mm	Outside diameter, lower tolerance
$B_{\text{OT}}$	0 mm	Width inner ring, upper tolerance
$d_{\text{UT}}$	-0,05 mm	Bore diameter bearing, lower tolerance
$B_{\text{UT}}$	-0,5 mm	Width inner ring, lower tolerance
$d_{\text{OT}}$	0 mm	Bore diameter bearing, upper tolerance
$C_{\text{OT}}$	0 mm	Width outer ring, upper tolerance
$C_{\text{UT}}$	-1,2 mm	Width outer ring, lower tolerance
$G_{\text{r}}$	0 - 0,16	Radial Clearance
$G_{\text{rmax}}$	0,16 mm	Radial clearance, maximum
$G_{\text{rmin}}$	0 mm	Radial clearance, minimum

### Temperature range

$T_{\text{min}}$	-40 °C	Operating temperature min.
$T_{\text{max}}$	120 °C	Operating temperature max.



## Characteristics

---

-  Radial load
-  Axial load in one direction
-  Axial load in two directions
-  Lifetime lubrication, freedom from maintenance
-  Sealed on both sides
-  Large bearing
-  Static angular error and misalignment
-  Dynamic angular error and misalignment