


**GE110-FW-2RS** [↗](#)

## Spherical plain bearing

Radial spherical plain bearing, maintenance-free, sliding layer: ELGOGLIDE, inner ring curved surface with hard chromium coating, DIN ISO 12240-1, dimension series G, sealed

## Technical information

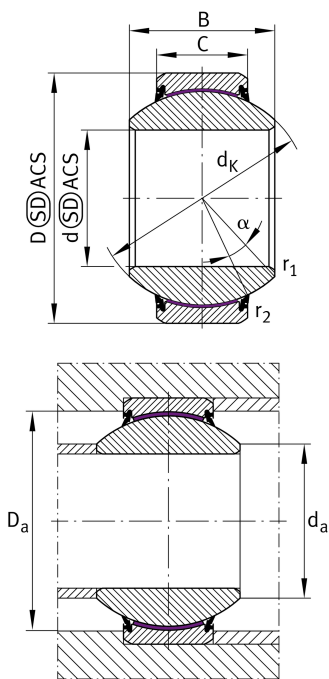

## Your current product variant

Maintenance	Maintenance free
Type of Seal	2RS Lip seal on both sides
Bore lining	Without
Coating	Without
Fabric	ELGOGLIDE
Material	Steel

## Main Dimensions &amp; Performance Data

d	110 mm	Bore diameter bearing
$C_r$	2.690.000 N	Basic dynamic load rating, radial
D	180 mm	Outside diameter bearing
B	100 mm	Width inner ring
C	70 mm	Width Outer ring
$C_{0r}$	4.480.000 N	Basic static load rating, radial
$m$	9,54 kg	Weight

## Mounting dimensions

$r_{1\text{min}}$	1 mm	Edge Spacing
$r_{2\text{min}}$	1 mm	Edge Spacing
$D_{\text{amin}}$	150 mm	Housing Connection Diameter
$d_{\text{amax}}$	124,9 mm	Connection measurement, inner ring



## Dimensions

$d_K$	160 mm	Ball diameter
$\alpha$	12 °	Tilt angle
$D_{OT}$	0 mm	Outside diameter, upper tolerance
$D_{UT}$	-0,025 mm	Outside diameter, lower tolerance
$B_{OT}$	0 mm	Width inner ring, upper tolerance
$d_{UT}$	-0,02 mm	Bore diameter bearing, lower tolerance
$B_{UT}$	-0,2 mm	Width inner ring, lower tolerance
$d_{OT}$	0 mm	Bore diameter bearing, upper tolerance
$C_{OT}$	0 mm	Width outer ring, upper tolerance
$C_{UT}$	-0,5 mm	Width outer ring, lower tolerance
$G_r$	0 - 0,085	Radial Clearance
$G_{rmax}$	0,085 mm	Radial clearance, maximum
$G_{rmin}$	0 mm	Radial clearance, minimum

## Temperature range

$T_{min}$	-30 °C	Operating temperature min.
$T_{max}$	130 °C	Operating temperature max.

## Characteristics

	Radial load
	Axial load in one direction
	Axial load in two directions
	Lifetime lubrication, freedom from maintenance
	Sealed on both sides
	Static angular error and misalignment
	Dynamic angular error and misalignment