

**FAG****NNU4164-M**

Cylindrical roller bearing



Technical information



Your current product variant


Cage	M	Brass Cage
Tolerance class	PN	Normal (ISO 492:2023)
Radial internal clearance	CN (Group N)	Normal internal clearance
Number of rows	2	Double-row design

Main Dimensions & Performance Data

d	320 mm	Bore diameter
D	540 mm	Outside diameter
B	218 mm	Width
C_r	3.350.000 N	Basic dynamic load rating, radial
C_{0r}	6.600.000 N	Basic static load rating, radial
C_{ur}	650.000 N	Fatigue load limit, radial
n_G Grease	1.620 1/min	Limiting speed for grease lubrication
n_G Oil	1.910 1/min	Limiting speed for oil lubrication
$\approx m$	205,97 kg	Weight

Mounting dimensions

d_a	340 mm	Diameter shaft shoulder
D_a	520 mm	Diameter of housing shoulder
$r_{a1 \max}$	4 mm	Maximum recess radius

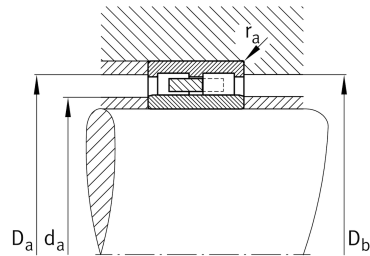



Dimensions

r _{1 min}	5 mm	Minimum chamfer dimension
F	375 mm	Raceway diameter inner ring
s	9,5 mm	Axial displacement
D ₁	465,1 mm	Shoulder diameter outer ring

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	150 °C	Operating temperature max.

Characteristics



Large bearing