

**FAG****NNU4180-M**

Cylindrical roller bearing



## Technical information

**Your current product variant**


Cage	M	Brass Cage
Tolerance class	PN	Normal (ISO 492:2014)
Radial internal clearance	CN (Group N)	Normal internal clearance
Number of rows	2	Double-row design

**Main Dimensions & Performance Data**

d	400 mm	Bore diameter
D	650 mm	Outside diameter
B	250 mm	Width
$C_r$	4.850.000 N	Basic dynamic load rating, radial
$C_{0r}$	9.600.000 N	Basic static load rating, radial
$C_{ur}$	900.000 N	Fatigue load limit, radial
$n_G$ Grease	1.280 1/min	Limiting speed for grease lubrication
$n_G$ Oil	1.510 1/min	Limiting speed for oil lubrication
$\approx m$	319,23 kg	Weight

**Mounting dimensions**

$d_a$	426 mm	Diameter shaft shoulder
$D_a$	624 mm	Diameter of housing shoulder
$r_{a1 \max}$	5 mm	Maximum recess radius

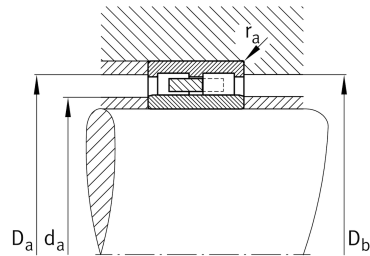



### Dimensions

---

r <sub>1 min</sub>	6 mm	Minimum chamfer dimension
F	463 mm	Raceway diameter inner ring
s	11,4 mm	Axial displacement
D <sub>1</sub>	577 mm	Shoulder diameter outer ring

### Temperature range

---

T <sub>min</sub>	-30 °C	Operating temperature min.
T <sub>max</sub>	150 °C	Operating temperature max.

### Characteristics

---



Large bearing