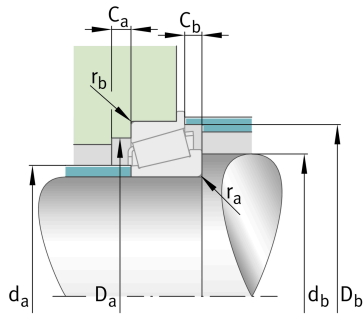



**FAG****33017-R**

Tapered roller bearing

Tapered roller bearings with flange 330, main dimensions acc. to DIN 720, separable

Technical information

**Your current product variant**

Tolerance class	PN	Normal (ISO 492:2023)
Heat treatment	Standard	
Cage	Standard	Sheet steel cage, window cage, roller-guided
Internal design	Standard	
Quality level	Standard	
Number of rows	1	Single-row design

Main Dimensions & Performance Data

d	85 mm	Bore diameter
D	130 mm	Outside diameter
B	36 mm	Width, inner ring
C	29,5 mm	Width, outer ring
T _F	12 mm	Width assembled flange bearing
C _r	184.000 N	Basic dynamic load rating, radial
C _{0r}	315.000 N	Basic static load rating, radial
C _{ur}	40.000 N	Fatigue load limit, radial
n _G	5.100 1/min	Limiting speed
n _{gr}	3.300 1/min	Thermal speed rating
≈m	1,776 kg	Weight



Mounting dimensions

$d_{a \max}$	94 mm	Maximum diameter of shaft shoulder
$d_{b \min}$	92 mm	Minimum diameter of shaft shoulder
$D_{a \min}$	118 mm	Minimum diameter of housing shoulder
$D_{a \max}$	122 mm	Maximum diameter of housing shoulder
$D_{b \min}$	125 mm	Minimum diameter of housing shoulder
$C_{a \min}$	6 mm	Minimum axial space
$C_{b \min}$	6,5 mm	Minimum axial space
$r_{a \max}$	1,5 mm	Maximum fillet radius of shaft
$r_{b \max}$	1,5 mm	Maximum fillet radius of housing

Dimensions

$r_{1, 2 \min}$	1,5 mm	Minimum chamfer dimension of inner ring back face
$r_{3, 4 \min}$	1,5 mm	Minimum chamfer dimension of outer ring back face
a	26 mm	Distance between the apexes of the pressure cones
d_1	108,5 mm	Guidance rib diameter of inner ring
D_1	136 mm	Outside diameter flange
C_1	5,5 mm	Width flange

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.

Calculation factors

e	0,29	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y	2,06	Dynamic axial load factor
Y_0	1,13	Static axial load factor



Additional information


T2CE085

Comparative designation to ISO 10317 and ISO 355


Characteristics



Radial load



Axial load in one direction



Grease Lubrication



Oil Lubrication



Not sealed