



FAG

30236-XL-DF-A250-300

Tapered roller bearing set

Tapered roller bearing set 302...-DF, X-arrangement

X-life

Technical information




Your current product variant

Tolerance class	PN	Normal (ISO 492:2014)
Heat treatment	Standard	
Cage	Standard	Sheet steel cage, window cage, roller-guided
Axial internal clearance	A250-300	Axial internal clearance between 250 and 300 µm
Quality level	XL	X-life
Matched arrangement	F	X arrangement
Number of rolling element rows	2	Double-row design

Main Dimensions & Performance Data

d	180 mm	Bore diameter
D	320 mm	Outside diameter
2B	104 mm	Inner ring total width
2T	114 mm	Outer ring total width
C_r	1.230.000 N	Basic dynamic load rating, radial
C_{0r}	1.700.000 N	Basic static load rating, radial
C_{ur}	214.000 N	Fatigue load limit, radial
n_G	2.650 1/min	Limiting speed
n_{gr}	1.250 1/min	Thermal speed rating
$\approx m$	37 kg	Weight

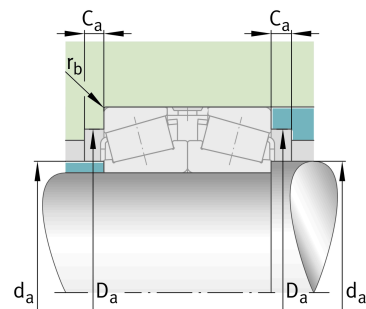



Mounting dimensions

$d_{a \max}$	211 mm	Maximum diameter of shaft shoulder
$D_{a \min}$	278 mm	Minimum diameter of housing shoulder
$D_{a \max}$	302 mm	Maximum diameter of housing shoulder
$C_{a \min}$	9 mm	Minimum axial space
$r_{b \max}$	4 mm	Maximum fillet radius of housing

Dimensions

$r_{3,4 \min}$	4 mm	Minimum chamfer dimension of outer ring back face
A	28 mm	Width of spacer

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	200 °C	Operating temperature max.

Calculation factors

e	0,45	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	1,5	Dynamic axial load factor
Y_2	2,23	Dynamic axial load factor
Y_0	1,47	Static axial load factor

Characteristics

	Radial load
	Axial load in one direction
	Axial load in two directions
	Grease Lubrication
	Oil Lubrication
	Not sealed
	Large bearing