



FAG

**WS22216-E1-XL-K-2RSR**

Spherical Roller Bearing

Spherical roller bearing WS222..-E1-XL-K-2RSR, symmetric with cage guidance ring

X-life

## Technical information




## Your current product variant

Design	E1	Without central rip
Bore type	K	Tapered, taper 1:12
Cage	JPA	Sheet metal cage
Radial internal clearance	CN (Group N)	Normal internal clearance
Relubrication	Standard	
Type of Seal	2RSR	Seals on both sides, normal temperature
Sealing - excess width	WS	Sealing - excess width

## Main Dimensions &amp; Performance Data

d	80 mm	Bore diameter
D	140 mm	Outside diameter
B	40 mm	Width
C <sub>r</sub>	250.000 N	Basic dynamic load rating, radial
C <sub>0r</sub>	270.000 N	Basic static load rating, radial
C <sub>ur</sub>	34.500 N	Fatigue load limit, radial
n <sub>G</sub>	1.540 1/min	Limiting speed
≈m	2,323 kg	Weight

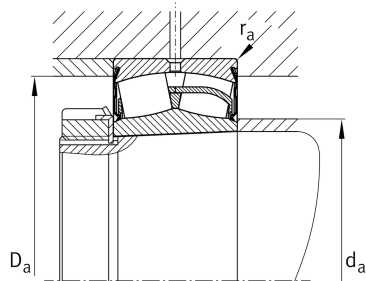



### Mounting dimensions

$d_{a \min}$	91 mm	Minimum diameter shaft shoulder
$d_{a \max}$	91,3 mm	Maximum diameter of shaft shoulder
$D_{a \max}$	129 mm	Maximum diameter of housing shoulder
$r_{a \max}$	2 mm	Maximum recess radius
$d_{b \min}$	85 mm	Minimum cavity diameter of the sleeve
$B_{a \min}$	12 mm	Minimum cavity width of the sleeve

### Dimensions

$r_{\min}$	2 mm	Minimum chamfer dimension
$D_1$	128,6 mm	Bore diameter outer ring
$d_2$	91,3 mm	Raceway diameter of the inner ring
$d_s$	3,2 mm	Diameter lubrication hole
$n_s$	6,5 mm	Width of lubricating groove

### Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	100 °C	Operating temperature max.

### Calculation factors

$e$	0,22	Limiting value of $F_a/F_r$ for the applicability of diff. Values of factors X and Y
$Y_1$	3,14	Dynamic axial load factor
$Y_2$	4,67	Dynamic axial load factor
$Y_0$	3,07	Static axial load factor

### Additional information

H2216-T-WS	Adapter sleeve
AH2216-WS	Withdrawal sleeve



## Characteristics

---



Radial load



Axial load in one direction



Axial load in two directions



Lifetime lubrication, freedom from maintenance



Grease Lubrication



Sealed on both sides



Static angular error and misalignment



Dynamic angular error and misalignment