


**NAO35X50X17**

Radial roller bearing

Radial roller bearing NAO

Technical information





Your current product variant

Cage	Standard	
Radial internal clearance	CN (Group N)	Normal internal clearance
Lubrication hole	Without	Without
Coating	Without	
Sealing	Without	
Special features	Without	
Number of rows	1	Single-row design

Main Dimensions & Performance Data

d	35 mm	Bore diameter
D	50 mm	Outside diameter
B	17 mm	Width
C_r	21.400 N	Basic dynamic load rating, radial
C_{0r}	41.500 N	Basic static load rating, radial
C_{ur}	5.300 N	Fatigue load limit, radial
n_G	11.500 1/min	Limiting speed
$n_{G \text{ Grease}}$	6.900 1/min	Limiting speed for grease lubrication
n_{gr}	6.500 1/min	Reference speed
$\approx m$	104,2 g	Weight

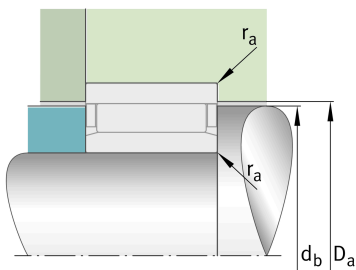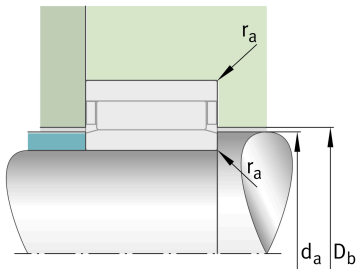



Mounting dimensions

$r_{a \max}$	0,3 mm	Maximum recess radius
d_a	39,5 mm	Mounting dimension
d_b	44,4 mm	Shoulder diameter axial guidance NK/shaft
D_a	45,5 mm	Shoulder diameter outer ring
D_b	40,6 mm	Shoulder diameter axial guidance NK/housing






Dimensions

r_{\min}	0,3 mm	Minimum chamfer dimension
E	45 mm	Raceway diameter outer ring
F	40 mm	Raceway diameter inner ring
s	0,8 mm	Axial displacement

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.

Characteristics

	Radial load
	Grease Lubrication
	Oil Lubrication
	Not sealed
	Small design envelope