

**ZKLF100200-2Z-XL**

Axial angular contact ball bearing

Axial angular contact ball bearings ZKLF..-2Z, double direction, for screw mounting, gap seals on both sides

X-life




Technical information

Your current product variant

Sealing	2Z	Minimal gap seal on both sides
Tolerance class	Standard	

Main Dimensions & Performance Data

d	100 mm	Bore diameter
	0 mm	Bore diameter upper tolerance
	-0,008 mm	Bore diameter lower tolerance
D	200 mm	Outside diameter
	0 mm	Outside diameter upper tolerance
	-0,015 mm	Outside diameter lower tolerance
B	55 mm	Width
	0 mm	Width upper tolerance
	-0,25 mm	Width lower tolerance
C _a	154.000 N	Basic dynamic load rating, axial
C _{0a}	435.000 N	Basic static load rating, axial
C _{ua}	23.000 N	Fatigue load limit, axial
n _G Grease	3.300 1/min	Limiting speed for grease lubrication
n _g	2.150 1/min	Thermally safe operating speed
M _R	2,6 Nm	Bearing frictional torque
≈m	8,372 kg	Weight

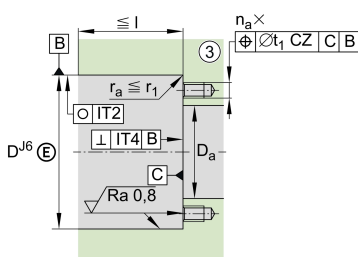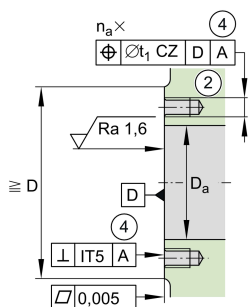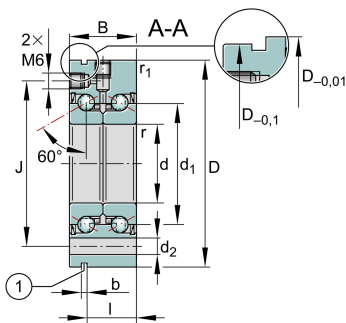



Mounting dimensions

$D_{a\ max}$	150 mm	Maximum diameter of housing
$d_{a\ min}$	128 mm	Minimum diameter shaft
t_1	0,2 mm	Position tolerance of bore in the housing
	M10	Size of fixing screws
n_a	8	Number of holes in adjacent construction
t_a	45 °	Pitch separation angle of holes in adjacent construction
	M6	Connection thread for lubrication

Dimensions

d_1	132 mm	Rib diameter inner ring
r_{\min}	0,6 mm	Minimum chamfer dimension
$r_{1\ min}$	0,6 mm	Minimum chamfer dimension
J	175 mm	Pitch circle diameter fixing holes
d_2	11 mm	Fixing holes diameter
b	3 mm	Width of extraction slot
l	45 mm	Distance of extraction slot
n	8	Pitch quantity of fixing holes
t	45 °	Pitch separation angle of fixing holes
a	60 °	Contact angle

Temperature range







T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.



Additional information

c_{aL}	1.900 N/ μ m	Rigidity axial
c_{kL}	5.800 Nm/mrad	Tilting rigidity
M_m	85,3 kg*cm ²	Mass moment of inertia
	3 μ m	Axial runout
	ZMA100/140	Recommended INA precision locknut for radial locking
	AM100	Recommended INA precision locknut for axial locking
M_A	250 Nm	Tightening torque for the recommended INA precision locknut
	25.624 N	Required locknut force axial

Characteristics

-  Radial load
-  Axial load in one direction
-  Axial load in two directions
-  Lifetime lubrication, freedom from maintenance
-  Grease Lubrication
-  Sealed on both sides