




**ZKLF40100-2Z-XL**

Axial angular contact ball bearing

Axial angular contact ball bearings ZKLF..-2Z, double direction, for screw mounting, gap seals on both sides

X-life

Technical information

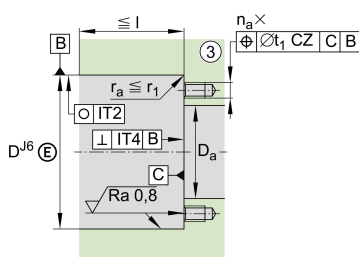

Your current product variant

| | | |
|-----------------|----------|--------------------------------|
| Sealing | 2Z | Minimal gap seal on both sides |
| Tolerance class | Standard | |

Main Dimensions & Performance Data

| | | |
|--------------------------|-------------|---------------------------------------|
| d | 40 mm | Bore diameter |
| | 0 mm | Bore diameter upper tolerance |
| | -0,005 mm | Bore diameter lower tolerance |
| D | 100 mm | Outside diameter |
| | 0 mm | Outside diameter upper tolerance |
| | -0,01 mm | Outside diameter lower tolerance |
| B | 34 mm | Width |
| | 0 mm | Width upper tolerance |
| | -0,25 mm | Width lower tolerance |
| C _a | 47.500 N | Basic dynamic load rating, axial |
| C _{0a} | 101.000 N | Basic static load rating, axial |
| C _{ua} | 6.100 N | Fatigue load limit, axial |
| n _G Grease | 5.200 1/min | Limiting speed for grease lubrication |
| n _g | 3.300 1/min | Thermally safe operating speed |
| M _R | 0,35 Nm | Bearing frictional torque |
| ≈m | 1,468 kg | Weight |



Mounting dimensions

| | | |
|--------------|--------|--|
| $D_{a \max}$ | 67 mm | Maximum diameter of housing |
| $d_{a \min}$ | 50 mm | Minimum diameter shaft |
| t_1 | 0,2 mm | Position tolerance of bore in the housing |
| | M8 | Size of fixing screws |
| n_a | 4 | Number of holes in adjacent construction |
| t_a | 90 ° | Pitch separation angle of holes in adjacent construction |
| | M6 | Connection thread for lubrication |

Dimensions

| | | |
|--------------|--------|--|
| d_1 | 58 mm | Rib diameter inner ring |
| r_{\min} | 0,3 mm | Minimum chamfer dimension |
| $r_{1 \min}$ | 0,6 mm | Minimum chamfer dimension |
| J | 80 mm | Pitch circle diameter fixing holes |
| d_2 | 8,8 mm | Fixing holes diameter |
| b | 3 mm | Width of extraction slot |
| l | 25 mm | Distance of extraction slot |
| n | 8 | Pitch quantity of fixing holes |
| t | 45 ° | Pitch separation angle of fixing holes |
| a | 60 ° | Contact angle |

Temperature range







| | | |
|------------|--------|----------------------------|
| T_{\min} | -30 °C | Operating temperature min. |
| T_{\max} | 120 °C | Operating temperature max. |



Additional information

| | | |
|----------|-------------------------|---|
| c_{aL} | 1.000 N/ μ m | Rigidity axial |
| c_{kL} | 550 Nm/mrad | Tilting rigidity |
| M_m | 2,26 kg*cm ² | Mass moment of inertia |
| | 2,5 μ m | Axial runout |
| | ZM40 | Recommended INA precision locknut for radial locking |
| | AM40 | Recommended INA precision locknut for axial locking |
| M_A | 55 Nm | Tightening torque for the recommended INA precision locknut |
| | 13.412 N | Required locknut force axial |

Characteristics

-  Radial load
-  Axial load in one direction
-  Axial load in two directions
-  Lifetime lubrication, freedom from maintenance
-  Grease Lubrication
-  Sealed on both sides