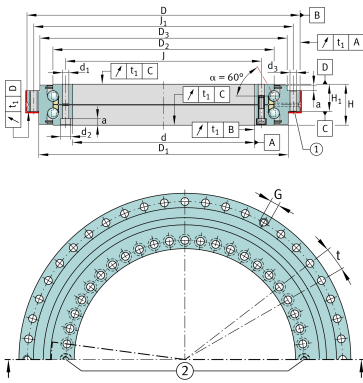


**ZKLDF395**

## Axial angular contact ball bearing

Axial angular contact ball bearings ZKLDF, double direction, for screw mounting, sealing shields on both sides

## Technical information



## Your current product variant

Generation	B
------------	---

## Main Dimensions &amp; Performance Data

d	395 mm	Bore diameter
	0 mm	Bore diameter upper tolerance
	-0,023 mm	Bore diameter lower tolerance
D	525 mm	Flange diameter
	0 mm	Flange diameter upper tolerance
	-0,028 mm	Flange diameter lower tolerance
H	65 mm	Height
$n_G$	1.600 1/min	Limiting speed
$C_a$	241.000 N	Basic dynamic load rating, axial
$C_{0a}$	1.580.000 N	Basic static load rating, axial
$C_{ua}$	34.000 N	Fatigue load limit, axial
$\approx m$	32,4 kg	Weight



### Mounting dimensions

J	415 mm	Pitch circle diameter fixing holes in inner ring
J <sub>1</sub>	505 mm	Pitch circle diameter fixing holes in outer ring
d <sub>1</sub>	9,3 mm	Fixing holes diameter inner ring
d <sub>2</sub>	15 mm	Counterbore diameter of fixing holes
a	8,2 mm	Counterbore depth of fixing holes
	46	Quantity of fixing holes inner ring
d <sub>3</sub>	9,3 mm	Fixing holes diameter outer ring
	45	Quantity of fixing holes outer ring
n	48	Pitch quantity
t	7,5 °	Pitch separation angle
G	M12	Threaded extraction hole
	3	Quantity of threaded extraction hole
M <sub>A</sub>	34 Nm	Screw tightening torque
	2	Quantity of retaining screws

### Dimensions

H <sub>1</sub>	42,5 mm	Height contact face outer ring
	0,2 mm	Height contact face outerring H1 upper tolerance
	-0,2 mm	Height contact face outerring H1 lower tolerance
D <sub>1</sub>	486 mm	Outside diameter D1
D <sub>2</sub>	450 mm	Rib diameter inner ring
D <sub>3</sub>	488 mm	Outside diameter D3
t <sub>1</sub>	6 μm	Axial and radial runout, measurement standard; Measured on mounted bearing, with ideal adjacent construction.

### Temperature range









T <sub>min</sub>	-30 °C	Operating temperature min.
T <sub>max</sub>	120 °C	Operating temperature max.



### Additional information

$c_{aL}$	4.500 N/ $\mu$ m	Axial rigidity of bearing position
$c_{rL}$	900 N/ $\mu$ m	Radial rigidity of bearing position
$c_{kL}$	100.000 Nm/mrad	Tilting rigidity of bearing position
$c_{aL}$	6.300 N/ $\mu$ m	Axial rigidity of rolling element set
$c_{rW}$	900 N/ $\mu$ m	Radial rigidity of rolling element set
$c_{kW}$	148.000 Nm/mrad	Tilting rigidity of rolling element set

### Characteristics

-  Radial load
-  Axial load in one direction
-  Axial load in two directions
-  Moments about all axes
-  Lifetime lubrication, freedom from maintenance
-  Grease Lubrication
-  Sealed on both sides
-  Large bearing