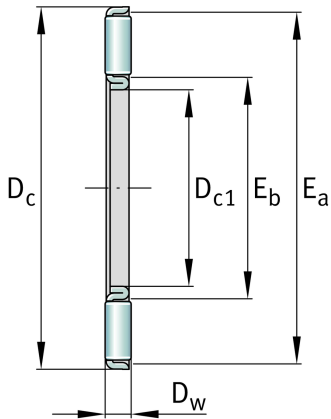
**AXK160200-A/0-10** [🔗](#)

## Axial needle roller and cage assembly

Axial needle roller and cage assemblies,  
single direction, to DIN 5405-2

## Technical information

**Main Dimensions & Performance Data**

$D_{c1}$	160 mm	Bore diameter cage
$D_c$	200 mm	Outside diameter
$D_w$	5 mm	Rolling element diameter
$E_a$	197 mm	Raceway dimension
$E_b$	166 mm	Raceway dimension
$c_a$	148.000 N	Basic dynamic load rating, axial
$c_{0a}$	1.020.000 N	Basic static load rating, axial
$c_{ua}$	88.000 N	Fatigue load limit, axial
$n_G$	1.600 1/min	Limiting speed
$n_{gr}$	620 1/min	Reference speed
$\approx m$	232 g	Weight

**Temperature range**

$T_{min}$	-20 °C	Operating temperature min.
$T_{max}$	120 °C	Operating temperature max.

**Additional information**

AS160200

Axial bearing washer