


**YRTCMA260-XL**

## Axial/radial roller bearing

Axial/radial bearings, double direction, screw mounting, with integrated absolute angular measuring system

## Technical information

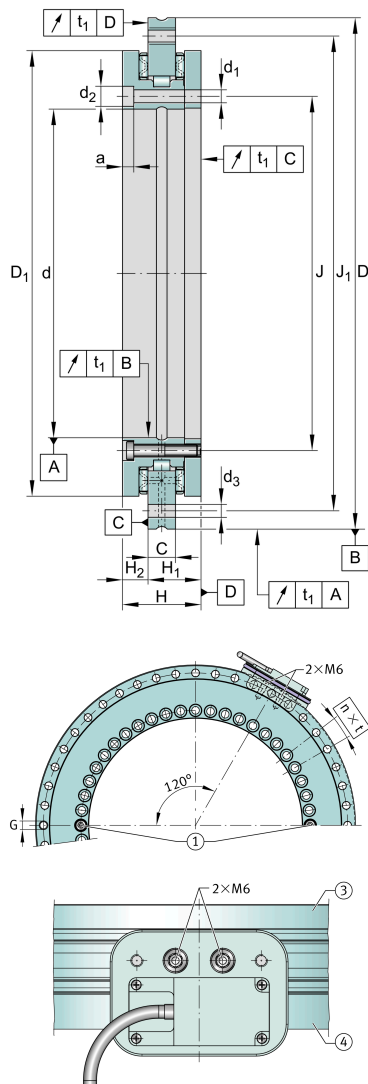

## Your current product variant

Angular measuring system integrated	MA	with absolute angular measuring system
-------------------------------------	----	--

## Main Dimensions &amp; Performance Data

d	260 mm	Bore diameter
	0 mm	Bore diameter upper tolerance
	-0,018 mm	Bore diameter lower tolerance
D	385 mm	Outside diameter
	0 mm	Outside diameter upper tolerance
	-0,02 mm	Outside diameter lower tolerance
H	57,5 mm	Height
$C_r$	140.000 N	Basic dynamic load rating, radial
$C_{0r}$	355.000 N	Basic static load rating, radial
$C_a$	168.000 N	Basic dynamic load rating, axial
$C_{0a}$	1.090.000 N	Basic static load rating, axial
$n_G$	300 1/min	Limiting speed
$M_R$	9 Nm	Bearing friction torque at 5 1/min
$\approx m$	18,401 kg	Weight



### Mounting dimensions

J	280 mm	Pitch circle diameter fixing holes in inner ring
J <sub>1</sub>	365 mm	Pitch circle diameter fixing holes in outer ring
d <sub>1</sub>	9,3 mm	Fixing holes diameter inner ring
d <sub>2</sub>	15 mm	Counterbore diameter of fixing holes
a	8,2 mm	Counterbore depth of fixing holes
	34	Quantity of fixing holes inner ring
d <sub>3</sub>	9,3 mm	Fixing holes diameter outer ring
	33	Quantity of fixing holes outer ring
n	36	Pitch quantity
t	10 °	Pitch separation angle
G	M12	Threaded extraction hole
	3	Quantity of threaded extraction hole
M <sub>A</sub>	34 Nm	Screw tightening torque
	2	Quantity of retaining screws
t <sub>1</sub>	6 μm	Axial and radial runout, measurement standard; Measured on mounted bearing, with ideal adjacent construction.

### Dimensions

H <sub>1</sub>	36,5 mm	Height contact face outer ring
	0,04 mm	Height contact face outerring H1 upper tolerance
	-0,04 mm	Height contact face outerring H1 lower tolerance
H <sub>2</sub>	21 mm	Height contact face outer ring
	0,025 mm	Height contact face outerring H2 upper tolerance
	-0,025 mm	Height contact face outerring H2 lower tolerance
D <sub>1 max</sub>	347 mm	Maximum diameter inner ring
C	18 mm	Width of outer ring










### Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.

### Additional information

$c_{aL}$	13.800 N/ $\mu$ m	Axial rigidity of bearing position
$c_{rL}$	7.400 N/ $\mu$ m	Radial rigidity of bearing position
$c_{kL}$	166.000 Nm/mrad	Tilting rigidity of bearing position
$c_{aW}$	19.000 N/ $\mu$ m	Axial rigidity of rolling element set
$c_{rW}$	8.100 N/ $\mu$ m	Radial rigidity of rolling element set
$c_{kW}$	265.000 Nm/mrad	Tilting rigidity of rolling element set

### Characteristics

	Radial load
	Axial load in one direction
	Axial load in two directions
	Moments about all axes
	Grease Lubrication
	Not sealed
	Large bearing