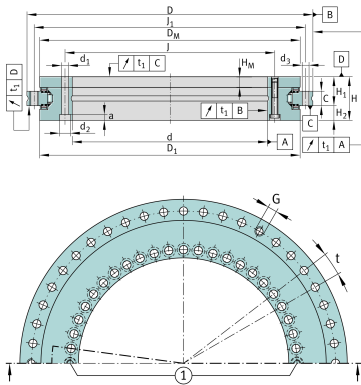


**YRTSM260** [↗](#)

## Axial/radial roller bearing

Axial/radial bearings, double direction, screw mounting, for higher speeds, with integrated angular measuring system

## Technical information

**Main Dimensions & Performance Data**

d	260 mm	Bore diameter
	0 mm	Bore diameter upper tolerance
	-0,018 mm	Bore diameter lower tolerance
D	385 mm	Outside diameter
	0 mm	Outside diameter upper tolerance
	-0,02 mm	Outside diameter lower tolerance
H	55 mm	Height
$C_r$	110.000 N	Basic dynamic load rating, radial
$C_{0r}$	305.000 N	Basic static load rating, radial
$C_a$	173.000 N	Basic dynamic load rating, axial
$C_{0a}$	1.050.000 N	Basic static load rating, axial
$n_G$	910 1/min	Limiting speed
$m$	17,514 kg	Weight



### Mounting dimensions

J	280 mm	Pitch circle diameter fixing holes in inner ring
J <sub>1</sub>	365 mm	Pitch circle diameter fixing holes in outer ring
d <sub>1</sub>	9,3 mm	Fixing holes diameter inner ring
d <sub>2</sub>	15 mm	Counterbore diameter of fixing holes
a	8,2 mm	Counterbore depth of fixing holes
	34	Quantity of fixing holes inner ring
d <sub>3</sub>	9,3 mm	Fixing holes diameter outer ring
	33	Quantity of fixing holes outer ring
n	36	Pitch quantity
t	10 °	Pitch separation angle
G	M12	Threaded extraction hole
	3	Quantity of threaded extraction hole
M <sub>A</sub>	34 Nm	Screw tightening torque
	2	Quantity of retaining screws
t <sub>1</sub>	6 μm	Axial and radial runout, measurement standard; Measured on mounted bearing, with ideal adjacent construction.

### Dimensions

H <sub>1</sub>	36,5 mm	Height contact face outer ring
	0,05 mm	Height contact face outerring H1 upper tolerance
	-0,07 mm	Height contact face outerring H1 lower tolerance
H <sub>2</sub>	18,5 mm	Height contact face outer ring
H <sub>M</sub>	13,5 mm	Height shaft washer
D <sub>1 max</sub>	347 mm	Maximum diameter inner ring
D <sub>M</sub>	343,69 mm	Diameter of dimensional scale on shaft locating washer
C	18 mm	Width of outer ring










### Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.

### Additional information

$c_{aL}$	9.700 N/ $\mu\text{m}$	Axial rigidity of bearing position
$c_{rL}$	6.400 N/ $\mu\text{m}$	Radial rigidity of bearing position
$c_{kL}$	120.600 Nm/mrad	Tilting rigidity of bearing position
$c_{aW}$	16.800 N/ $\mu\text{m}$	Axial rigidity of rolling element set
$c_{rW}$	5.800 N/ $\mu\text{m}$	Radial rigidity of rolling element set
$c_{kW}$	201.000 Nm/mrad	Tilting rigidity of rolling element set
$M_m$	1.422 kg*cm <sup>2</sup>	Mass moment of inertia for rotating outer ring
$M_m$	2.074 kg*cm <sup>2</sup>	Mass moment of inertia for rotating inner ring

### Characteristics

	Radial load
	Axial load in one direction
	Axial load in two directions
	Moments about all axes
	Grease Lubrication
	Not sealed
	Large bearing