


**YRTSMA260**

Axial/radial roller bearing

Axial/radial bearings, double direction, screw mounting, for higher speeds, with integrated absolute angular measuring system

Technical information

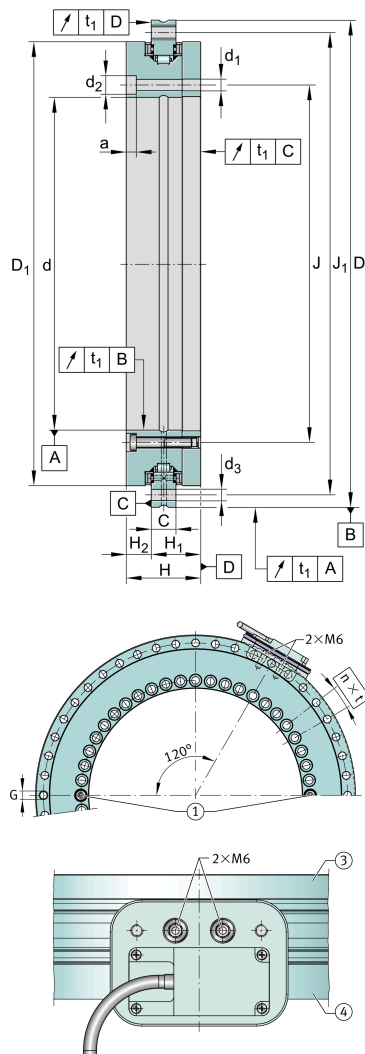

Your current product variant

| | | |
|-------------------------------------|----|--|
| Angular measuring system integrated | MA | with absolute angular measuring system |
|-------------------------------------|----|--|

Main Dimensions & Performance Data

| | | |
|-------------|-------------|-----------------------------------|
| d | 260 mm | Bore diameter |
| | 0 mm | Bore diameter upper tolerance |
| | -0,018 mm | Bore diameter lower tolerance |
| D | 385 mm | Outside diameter |
| | 0 mm | Outside diameter upper tolerance |
| | -0,02 mm | Outside diameter lower tolerance |
| H | 57,5 mm | Height |
| C_r | 110.000 N | Basic dynamic load rating, radial |
| C_{0r} | 305.000 N | Basic static load rating, radial |
| C_a | 173.000 N | Basic dynamic load rating, axial |
| C_{0a} | 1.050.000 N | Basic static load rating, axial |
| n_G | 910 1/min | Limiting speed |
| $\approx m$ | 18,7 kg | Weight |



Mounting dimensions

| | | |
|----------------|--------|---|
| J | 280 mm | Pitch circle diameter fixing holes in inner ring |
| J ₁ | 365 mm | Pitch circle diameter fixing holes in outer ring |
| d ₁ | 9,3 mm | Fixing holes diameter inner ring |
| d ₂ | 15 mm | Counterbore diameter of fixing holes |
| a | 8,2 mm | Counterbore depth of fixing holes |
| | 34 | Quantity of fixing holes inner ring |
| d ₃ | 9,3 mm | Fixing holes diameter outer ring |
| | 33 | Quantity of fixing holes outer ring |
| n | 36 | Pitch quantity |
| t | 10 ° | Pitch separation angle |
| G | M12 | Threaded extraction hole |
| | 3 | Quantity of threaded extraction hole |
| M _A | 34 Nm | Screw tightening torque |
| | 2 | Quantity of retaining screws |
| t ₁ | 6 μm | Axial and radial runout, measurement standard; Measured on mounted bearing, with ideal adjacent construction. |

Dimensions

| | | |
|--------------------|----------|--|
| H ₁ | 36,5 mm | Height contact face outer ring |
| | 0,05 mm | Height contact face outerring H1 upper tolerance |
| | -0,07 mm | Height contact face outerring H1 lower tolerance |
| H ₂ | 21 mm | Height contact face outer ring |
| D _{1 max} | 347 mm | Maximum diameter inner ring |
| C | 18 mm | Width of outer ring |

Temperature range








| | | |
|------------------|--------|----------------------------|
| T _{min} | -30 °C | Operating temperature min. |
| T _{max} | 120 °C | Operating temperature max. |



Additional information

| | | |
|----------|--------------------------|--|
| c_{aL} | 9.700 N/ μ m | Axial rigidity of bearing position |
| c_{rL} | 6.400 N/ μ m | Radial rigidity of bearing position |
| c_{kL} | 120.600 Nm/mrad | Tilting rigidity of bearing position |
| c_{aW} | 16.800 N/ μ m | Axial rigidity of rolling element set |
| c_{rW} | 5.800 N/ μ m | Radial rigidity of rolling element set |
| c_{kW} | 201.000 Nm/mrad | Tilting rigidity of rolling element set |
| M_m | 1.422 kg*cm ² | Mass moment of inertia for rotating outer ring |
| M_m | 2.074 kg*cm ² | Mass moment of inertia for rotating inner ring |

Characteristics

-  Radial load
-  Axial load in one direction
-  Axial load in two directions
-  Moments about all axes
-  Grease Lubrication
-  Not sealed
-  Large bearing