**PBS35-XL**

## Plummer block housing unit

Plummer block housing units PBS, sheet steel housing, radial insert ball bearing with eccentric locking collar, P seals

X-life

## Technical information

## Your current product variant

Material	Steel sheet
----------	-------------

## Main Dimensions &amp; Performance Data



d	35 mm	Bore diameter
H <sub>2</sub>	94,4 mm	Height
L	165 mm	Length total
C <sub>0r</sub> G	4.100 N	Load carrying capacity (housing)
≈m	1,01 kg	Weight

## Mounting dimensions

J	127 mm	Distance fixing bore
N	13,5 mm	Width (slot)
N <sub>1</sub>	8 mm	Distance slot center
S	20,7 mm	Distance fixing

## Dimensions

H	47,6 mm	Distance shaft axis
A	46,1 mm	Width (base)
A <sub>1</sub>	22,2 mm	Width (head)
H <sub>1</sub>	4 mm	Height (base)
P	35 mm	Distance support

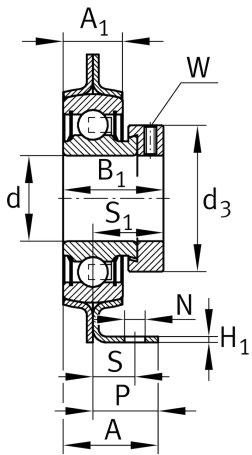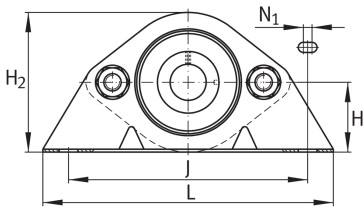



### Additional information

GEH72-PBS	Housing
RAE35-XL-NPP-B	Bearing designation

### Temperature range

T <sub>min</sub>	-20 °C	Operating temperature min.
T <sub>max</sub>	120 °C	Operating temperature max.