



**GLCTE35-XL**

## Flanged housing unit

Housing units GLCTE, two-bolt flanged housing units, cast iron, eccentric locking collar, P seals

X-life

## Technical information

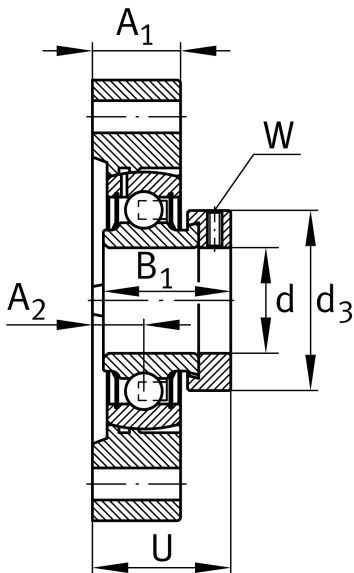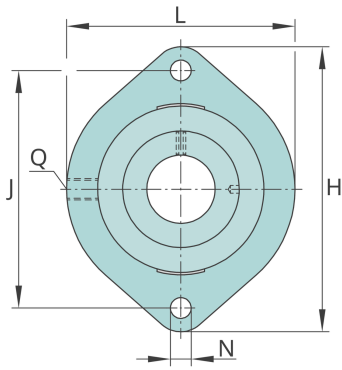

## Your current product variant

Material	GG	Grey cast iron
----------	----	----------------

## Main Dimensions &amp; Performance Data

d	35 mm	Bore diameter
L	94 mm	Flange width
H	126 mm	Height flange
U	42 mm	Total height unit
$C_r$	27.500 N	Basic dynamic load rating, radial
$C_{0r}$	15.300 N	Basic static load rating, radial
$C_{ur}$	650 N	Fatigue load limit, radial
$\approx m$	1,02 kg	Weight

## Mounting dimensions

J	100 mm	Distance fixing bore
N	11,5 mm	Fixing bore
n	2	Number of screwing holes



### Dimensions

A <sub>1</sub>	22 mm	Thickness of flange
A <sub>2</sub>	12,4 mm	Distance raceway
B <sub>1</sub>	39 mm	Locking collar total width
Q	M6	Connection thread for lubrication
d <sub>3</sub>	55 mm	Outside diameter eccentric locking collar

### Additional information

1	Number of housings
GLCTE07	Housing
GRAE35-XL-NPP-B	Bearing designation

### Temperature range

T <sub>min</sub>	-20 °C	Operating temperature min.
T <sub>max</sub>	120 °C	Operating temperature max.