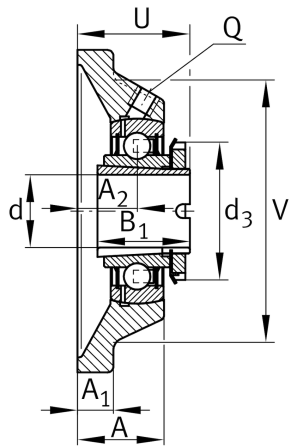



**RCJA35-N**

Flanged housing unit

Flanged housing unit RCJA..-N

Technical information

**Your current product variant**

Groove	N	Cast iron housing with undercut slot for end caps
Material	GG	Grey cast iron

Main Dimensions & Performance Data

d	35 mm	Bore diameter
L	118 mm	Flange width
U	46,2 mm	Total height unit
C _r	24.900 N	Basic dynamic load rating, radial
C _{0r}	15.300 N	Basic static load rating, radial
≈m	1,44 kg	Weight

Mounting dimensions

J	92 mm	Distance fixing bore
N	14 mm	Fixing bore
n	4	Number of screwing holes



Dimensions

A	32,5 mm	Height housing
A ₁	12,5 mm	Thickness of flange
A ₂	21 mm	Distance raceway
B ₁	34 mm	Locking collar total width
V	100 mm	Shoulder diameter housing
Q	M6	Connection thread for lubrication
d ₃	52 mm	Outside diameter locking device

Additional information

GEHCJ07-GG-N	Housing
GSH35-XL-2RSR-B	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	100 °C	Operating temperature max.