

**FAG****UKFC206**

Flanged housing unit

Flanged housing unit UKFC

## Technical information



## Your current product variant


Material	GG	Grey cast iron
----------	----	----------------

## Main Dimensions &amp; Performance Data

d	25 mm	Bore diameter
H	125 mm	Height flange
U	32,2 mm	Total height unit
C <sub>r</sub>	20.700 N	Basic dynamic load rating, radial
C <sub>0r</sub>	11.300 N	Basic static load rating, radial
C <sub>ur</sub>	590 N	Fatigue load limit, radial
≈m	1,32 kg	Weight

## Mounting dimensions

J	100 mm	Pitch circle diameter (holes)
N	12 mm	Fixing bore
N <sub>1</sub>	70,7 mm	Distance fixing bore
T <sub>1</sub>	8 mm	Height spigot
Z	80 mm	Diameter spigot
	h8	Diameter spigot clearance
n	4	Number of screwing holes

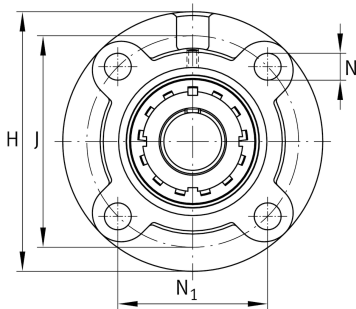



### Dimensions

A	23 mm	Height housing
A <sub>1</sub>	8 mm	Thickness of flange
A <sub>2</sub>	10 mm	Distance raceway
B	25 mm	Width
B <sub>1</sub>	38 mm	Locking collar total width
d <sub>3</sub>	45 mm	Outside diameter eccentric locking collar

### Additional information

1	Number of housings
FC265	Housing
UK206	Bearing designation

### Temperature range

T <sub>min</sub>	-20 °C	Operating temperature min.
T <sub>max</sub>	120 °C	Operating temperature max.