

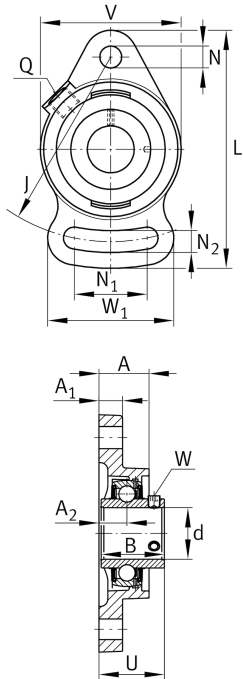
**PSFT25-XL**

## Take-up housing unit

Take-up housing units PSFT, cast iron housing, radial insert ball bearing with eccentric locking collar, P seals

X-life

## Technical information

**Your current product variant**

Material	GG	Grey cast iron
----------	----	----------------

**Main Dimensions & Performance Data**

d	25 mm	Bore diameter
L	124 mm	Length total
U	36 mm	Total height unit
≈m	0,5 kg	Weight

**Mounting dimensions**

N	11,5 mm	Fixing bore
N <sub>1</sub>	37,5 mm	Length (slot)
N <sub>2</sub>	11,5 mm	Width (slot)
J	99 mm	Distance fixing bore

**Dimensions**

A <sub>1</sub>	11 mm	Thickness of flange
A <sub>2</sub>	12,5 mm	Distance raceway
A	20 mm	Height housing
V	70 mm	Shoulder diameter housing
W	63 mm	Width housing slot side
Q	M6	Connection thread for lubrication



### Additional information

SFT05	Housing
GRAE25-XL-NPP-B	Bearing designation

### Temperature range

T <sub>min</sub>	-20 °C	Operating temperature min.
T <sub>max</sub>	120 °C	Operating temperature max.