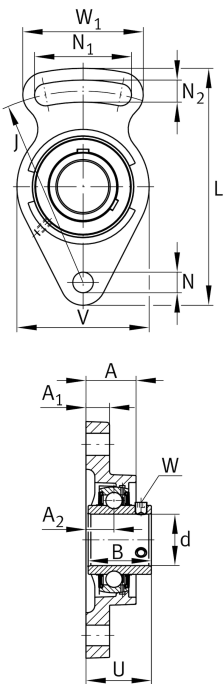


**FAG****UCFA207-21** [↗](#)

## Take-up housing unit

Housing units UCFA, cast iron housing, radial insert ball bearing with grub screws in inner ring, RSR seals, for swivel motion

## Technical information

**Your current product variant**

|          |    |                |
|----------|----|----------------|
| Material | GG | Grey cast iron |
|----------|----|----------------|

**Main Dimensions & Performance Data**

|    |          |                   |
|----|----------|-------------------|
| d  | 33,34 mm | Bore diameter     |
| L  | 161 mm   | Length total      |
| U  | 44,4 mm  | Total height unit |
| ≈m | 1,281 kg | Weight            |

**Mounting dimensions**

|                |        |                      |
|----------------|--------|----------------------|
| N              | 14 mm  | Fixing bore          |
| N <sub>1</sub> | 66 mm  | Length (slot)        |
| N <sub>2</sub> | 14 mm  | Width (slot)         |
| J              | 130 mm | Distance fixing bore |

**Dimensions**

|                |       |                                   |
|----------------|-------|-----------------------------------|
| A <sub>1</sub> | 16 mm | Thickness of flange               |
| A <sub>2</sub> | 19 mm | Distance raceway                  |
| A              | 34 mm | Height housing                    |
| V              | 90 mm | Shoulder diameter housing         |
| W              | 82 mm | Width housing slot side           |
| Q              | M6    | Connection thread for lubrication |



View product details on medias

23.05.2026, 10:57:07 UTC

SCHAEFFLER

### Additional information

|          |                     |
|----------|---------------------|
| FA207    | Housing             |
| UC207-21 | Bearing designation |

### Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |