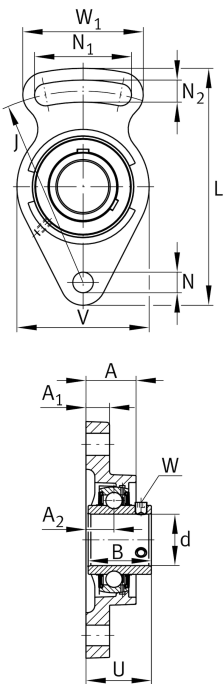


**FAG****UCFA210** [↗](#)

Take-up housing unit

Housing units UCFA, cast iron housing, radial insert ball bearing with grub screws in inner ring, RSR seals, for swivel motion

Technical information

**Your current product variant**

Material	GG	Grey cast iron
----------	----	----------------

Main Dimensions & Performance Data

d	50 mm	Bore diameter
L	190 mm	Length total
U	54,6 mm	Total height unit
≈m	2,09 kg	Weight

Mounting dimensions

N	16 mm	Fixing bore
N ₁	76 mm	Length (slot)
N ₂	16 mm	Width (slot)
J	157 mm	Distance fixing bore

Dimensions

A ₁	18 mm	Thickness of flange
A ₂	22 mm	Distance raceway
A	37,5 mm	Height housing
V	115 mm	Shoulder diameter housing
W	94 mm	Width housing slot side
Q	M6	Connection thread for lubrication



View product details on medias

01.06.2026, 10:01:22 UTC

SCHAEFFLER

Additional information

FA210	Housing
UC210	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.